


Wall-Mounted Filter





Wall-mounted Filter

Model: PK8025

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.

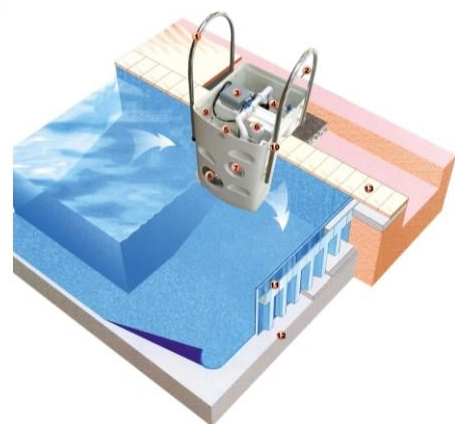

1. Stainless-steel hand rail
2. Cable pipe
3. Transformer and terminal box
4. Sewage pipe
5. Cartridge filter
6. Sterilizer
7. Injector nozzle
8. Swimming pool light
9. Water inlet
10. Water outlet
11. Hoarding
12. Concrete
13. Poolside tile

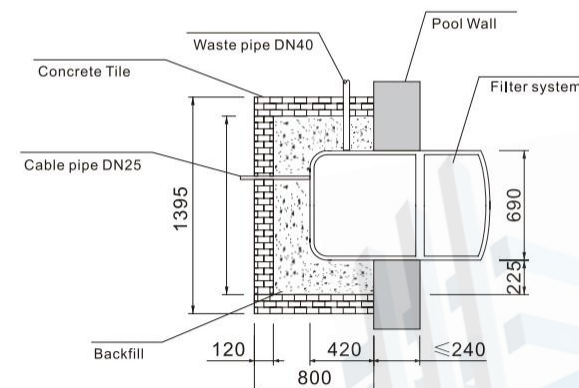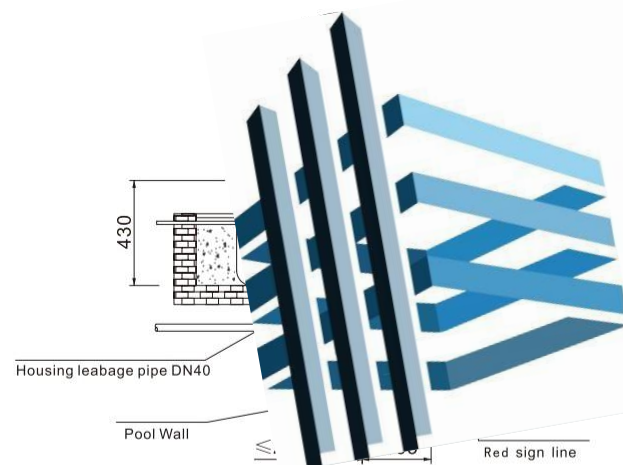

TECHNICAL CHARACTERISTICS

Dimensions	1120x 690x 1100mm
Flow rate	25m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Chlorine feeder	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc (options)



SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

Wall-mounted Filter

Model: PK8020 (Children Swimming Pool)

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.

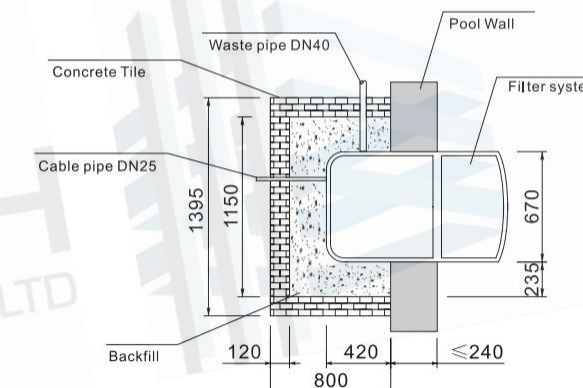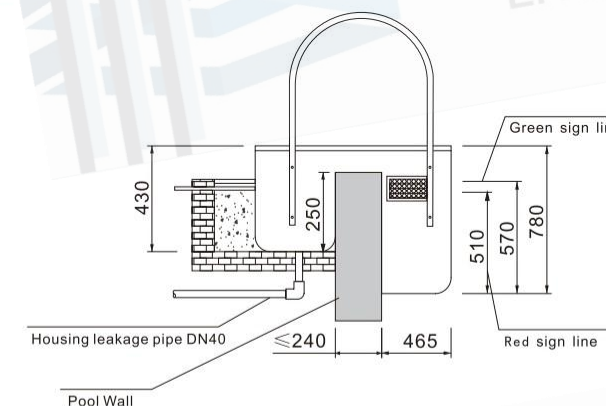

AUST TECH
ENGINEERING & SUPPLIES PTY LTD

Dimensions	1110x 670x 780mm
Flow rate	10m ³ /h 15m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x1HP	1x1.5HP
Filtration basket with bag	1pc	
Chlorine feeder	1pc	
Light (warm white)	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

Wall-mounted Filter

Model: PK8026

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



TECHNICAL CHARACTERISTICS



Dimensions	1150x 710x 1090mm	
Flow rate	25m ³ /h	35m ³ /h
Voltage	220V / 50Hz or 60Hz	
Precision of filtration bag	≤5u	
Operating noise	≤50Db	
Material	Acrylic	
Installation	Wall mounted	

EQUIPMENT

Filtration Pump	1x2HP	1x3HP
Filtration basket with bag	1pc	2pcs
Chlorine feeder	1pc	
Light (warm white)	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

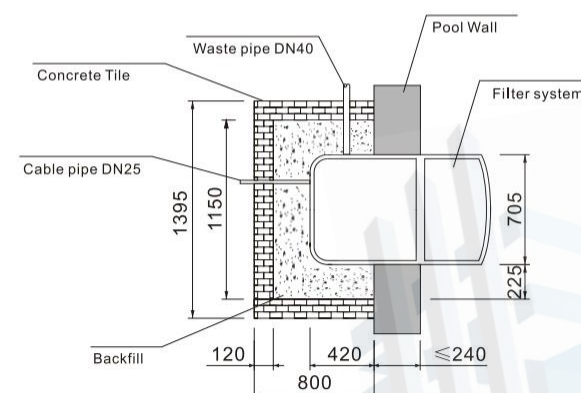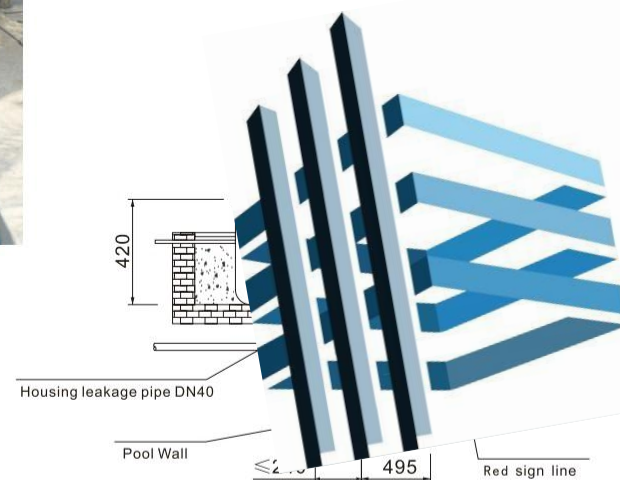

Wall-mounted Filter

Model: PK8028

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



leaf basket



spray nozzle



feeder



AUST TECH
ENGINEERING & SUPPLIES PTY LTD


	1150x 710x 1090mm	
	25m ³ /h	35m ³ /h
Voltage	220V / 50Hz or 60Hz	
Precision of filtration bag	≤5u	
Operating noise	≤50Db	
Material	Acrylic	
Installation	Wall mounted	

EQUIPMENT

Filtration Pump	1x2HP	1x3HP
Filtration basket with bag	1pc	2pcs
Chlorine feeder	1pc	
Light (warm white)	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM


Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

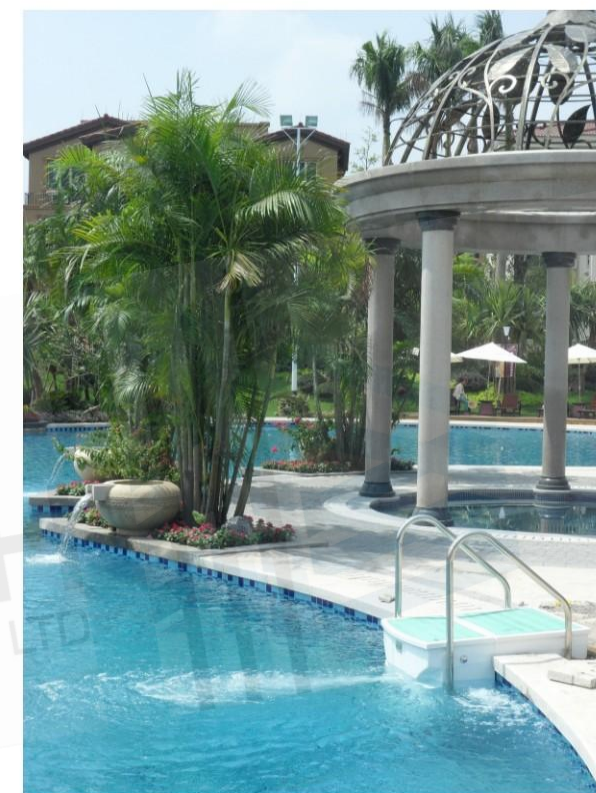

Wall-mounted Filter

Model: PK8023

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.

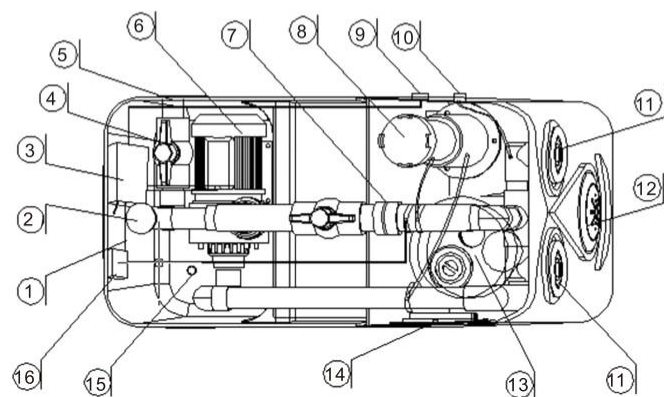

- 1.filter shell
- 2.water injector
- 3.control box
- 4.drain valve
- 5.drain water pipe
- 6.water pump
- 7.active connector
- 8.chlorinator feeder
- 9.make air controller c
- 10.air controller on/off
- 11.spa jet
- 12.pool light
- 13.water filter
- 14.water inlet
- 15.pressure water purifica
- 16.c

TECHNICAL CHARACTERISTICS



Dimensions	1050x550x860mm
Flow rate	10m ³ /h
Voltage	220V / 50Hz / 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x1HP
Filtration basket with bag	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

SYSTEM





Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

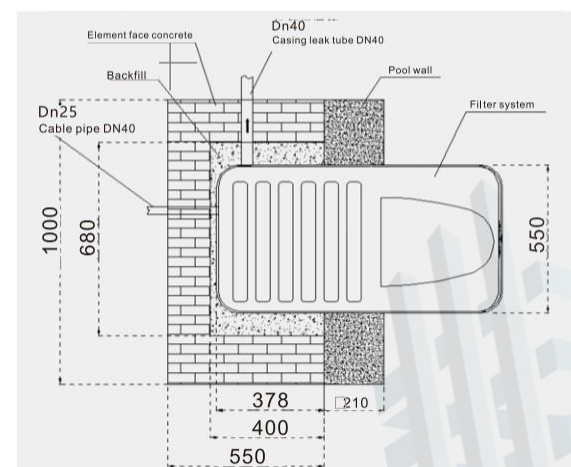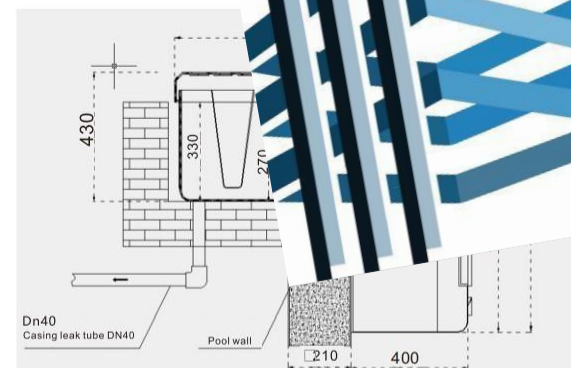

Inground Filter

Model: PK8030

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. This model is higher flow rate with 8pcs filter bags for big swimming pool. The filter is made according to Countries codes and standards.

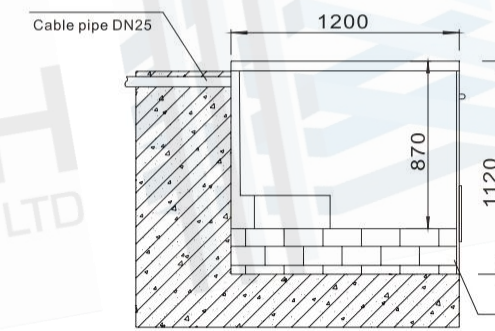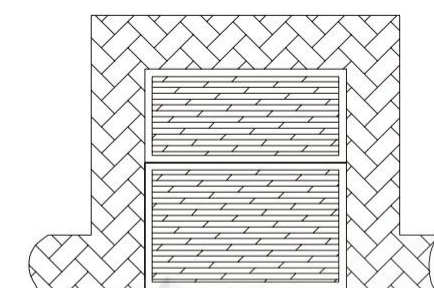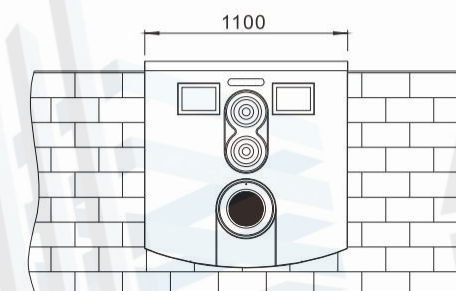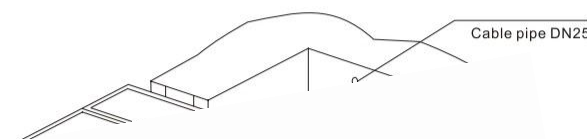

AUST TECH
ENGINEERING & SUPPLIES PTY LTD

TECHNICAL CHARACTERISTICS

Dimensions	1100x1200x1120mm
Flow rate	47m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Acrylic
Installation	Inground

EQUIPMENT

Filtration Pump	1x4HP
Filtration basket with bag	8pc
Chlorine feeder	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs x 5"

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

Wall-mounted Filter

Model: PK8021 (Children Swimming Pool)

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



TECHNICAL CHARACTERISTICS



Dimensions	950x580x800mm
Flow rate	10m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x1.5HP
Filtration basket with bag	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

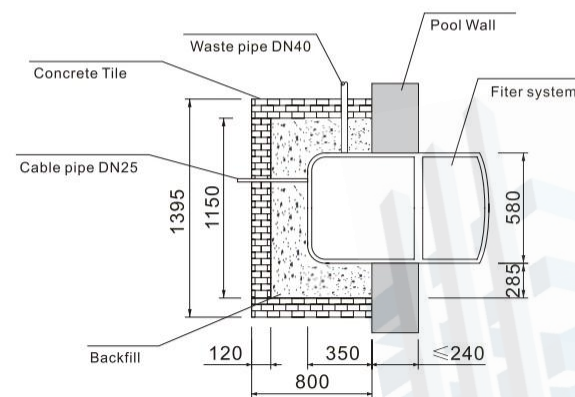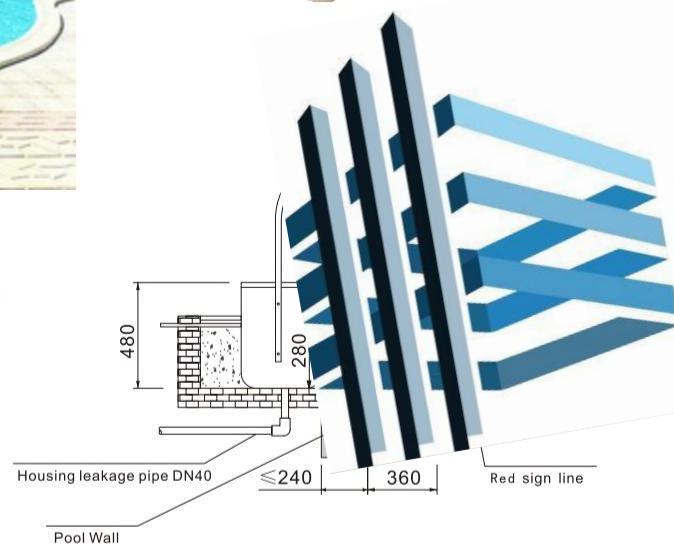

Wall-mounted Filter

Model: PK8029

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



AUST TECH
ENGINEERING & SUPPLIES PTY LTD



Dimensions	1095x 705x 1230mm
Flow rate	25m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Chlorine feeder	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc (options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

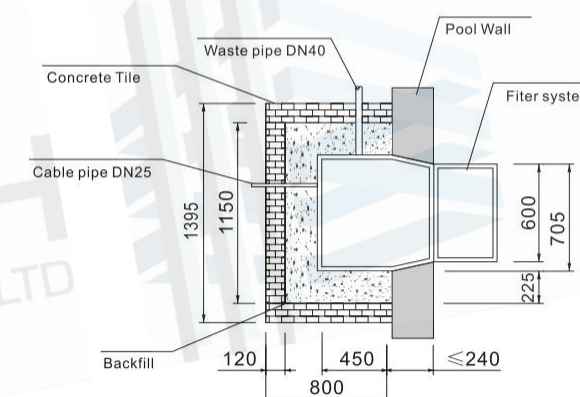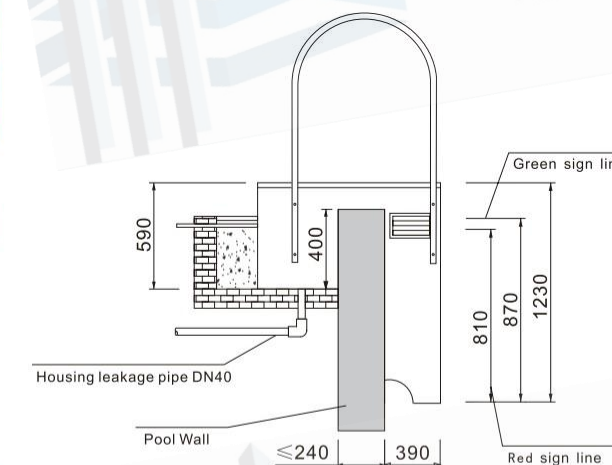

Wall-mounted Filter

Model: PK8032

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



TECHNICAL CHARACTERISTICS


Dimensions	1090X600X960
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

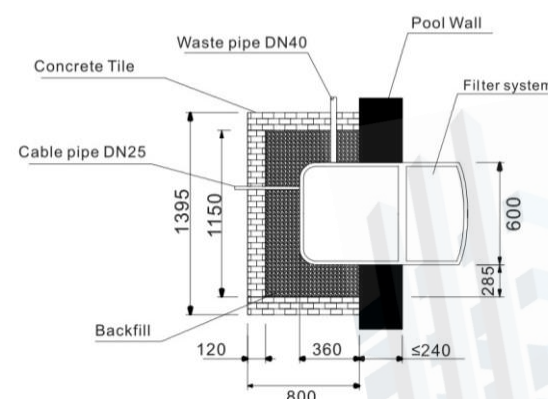

Wall-mounted Filter

Model: PK8022

The enclosure of wall-mounted filter is made of high quality ABS, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



AUST TECH
ENGINEERING & SUPPLIES PTY LTD

Dimensions	1450x530x1060mm
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	ABS
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Light (warm white)	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

