



AUST TECH
ENGINEERING & SUPPLIES PTY LTD



EPA-EX2



LED Exit Blade



RoHS


INTRODUCTION

Elegant Blade EXIT Sign for official using, available in recessed mount, ceiling mount, pendant mount, side mount, PA12 terminal support loop-in loop out. PMMA LGP shows uniformity luminance, single face or double face available.

FEATURES

- AS/NZS 2293.3 complied, SAA certified.
- Long life time LiFePO4 battery.
- Decal changeable for different application.
- Integrated IC controll, self-diagnostic and DALI test optional.
- Flexible design, battery easy changeable.

DIMENSION: mm

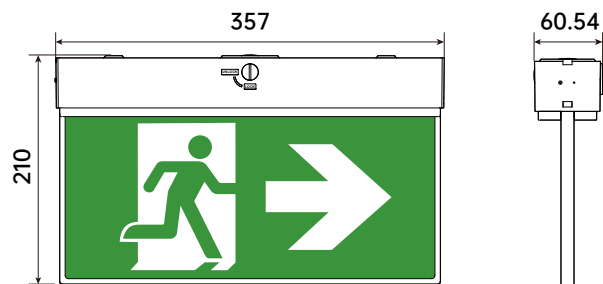

GENERAL

Voltage	220-240VAC, 50/60Hz
Mains Power	3W Max
Emergency Power	1W Max
Battery	LiFePO4 3.2V 600mAh
Charge Time	≥16H
Discharge Duration	≥2H
CCT/ CRI	6000K/ Ra>80
Visibility	24M
Test Mode	AT / MT / DALI
Wiring	Terminal block(0.75-6mm ²)
Protection Class	Class II
IP Rating	IP20

STRUCTURE

Material	PC
LGP	Acrylic (PMMA)
Decal	PVC
EM Classification	C0:D2.5, C90:D2.0
Operating Temp (°C)	0°C~45°C
Mounting Type	Ceiling/ Recessed/ Side/ Pendant Mount
Remarks	

INSTALLATION

