

AUST TECH

Engineering & Supplies Pty Limited


Phone/What's App: +61 (0)455466450

Wechat: +86 13580389746

E-mail: director@aust-tech.com.au

Website: www.aust-tech.com.au



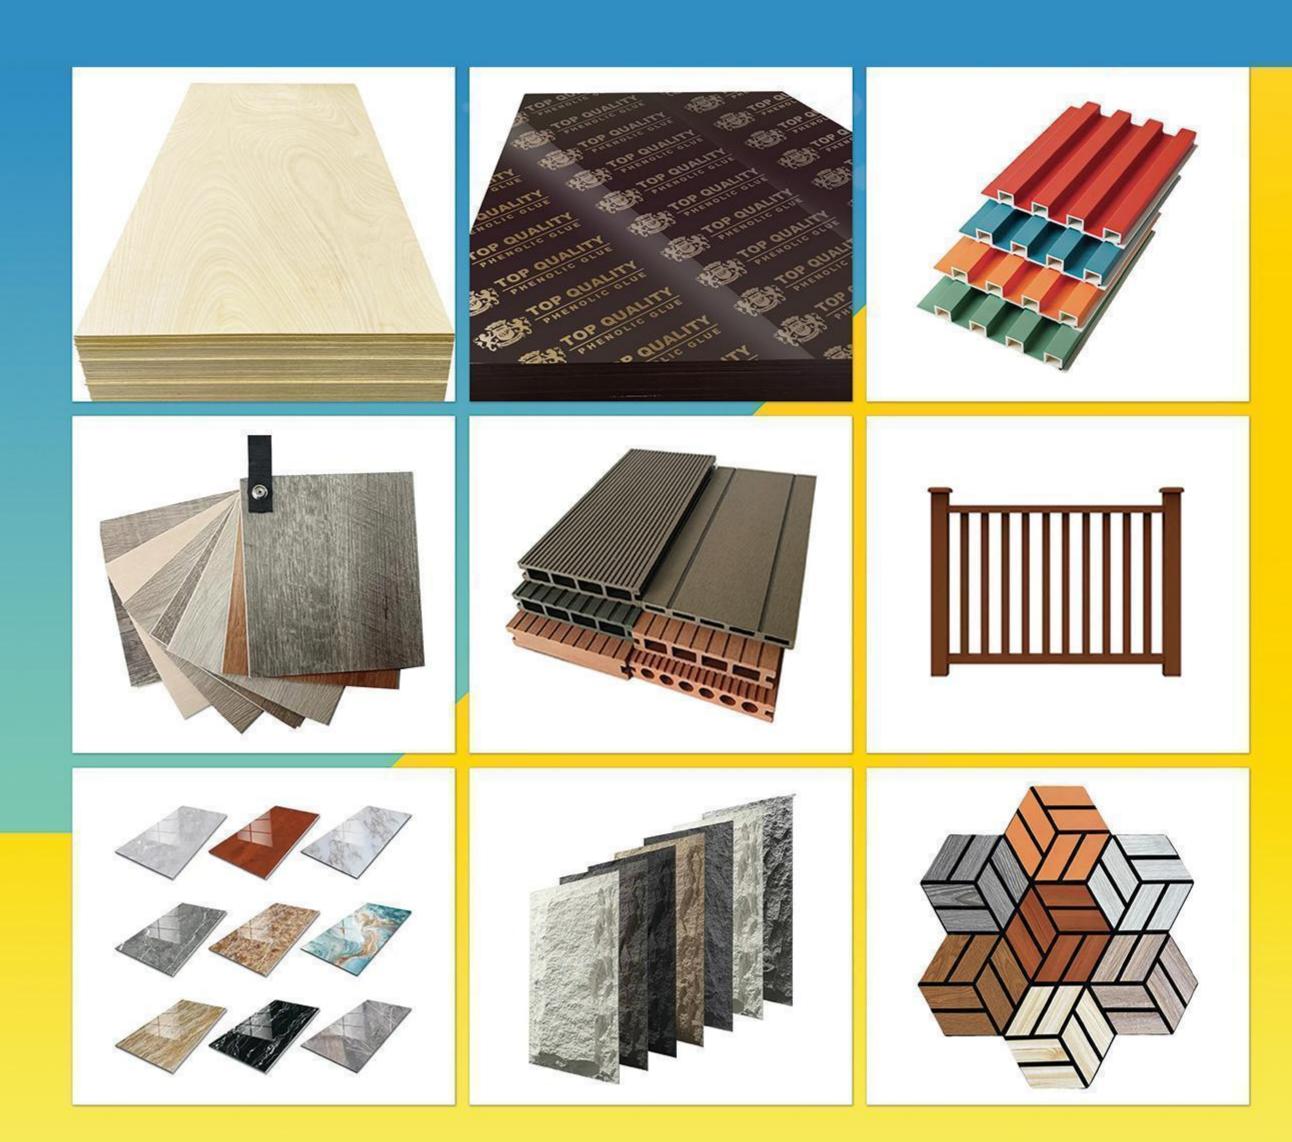

Manufacture and sales:
PLYWOOD, FILM FACE PLYWOOD,
WPC Wall Panel, WPC Decking, WPC Ceiling,
PVC Wall Panel, PVC Skirting, SPC Flooring, UV Panel,
Acoustic Panel, PU Culture Stone.


Green Life

Quality assuranceCredit first, Customer first

Our products is widely used in commercial, domestic constructive, furniture.





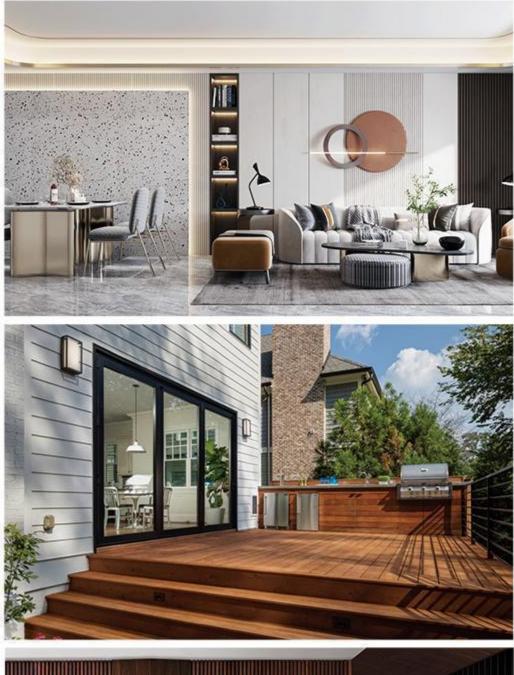








Film Face Plywood

It is made of wood fiber as raw material, with a smooth and clean surface that is not easily broken. High surface smoothness, uniform material, and high adhesion. It can be processed by bonding with many different materials and has a wide range of applications.

Details			
USE	Building and furniture		
Film	Dynea Brown film, Local Brown film, Local Black Film		
Core	Poplar, Combi, Birch, Hardwood		
Glue	WBP, MELAMINE, E1 MR		
Size	1220*2440mm 1250*2500mm 610*2440mm		
Thickness	5mm-21mm		
Packing	Inner packing: Inside pallet is wrapped with a 0.20mm plastic bag. Outer packing: Pallets are covered with PLYWOOD/MDF/CARTON and then PVC/steel tapes for strength		
Transport	By break bulk or con	tainer(Qty: 8plts/22m3/	(20GP, 16plts/48m³/40GP, 18plts/54m³/40HQ)
MOQ	54m³/Order	MSQ	5000m³/Month








Film Face Plywood

Film Face Plywood

Film Face Plywood







MDO Plywood

Anti-slip Film Face Plywood

Yellow Film Face Plywood

Plywood

It is made of wood fiber as raw material, with a smooth and clean surface that is not easily broken. High surface smoothness, uniform material, and high adhesion. It can be processed by bonding with many different materials and has a wide range of applications.

Details	
USE	Furniture manufacture, building decoration and Package
Face & Back	Okoume, Merianti, Bingtangor, Birch, Pine, Poplar, ETC
Core	Poplar, Birch, Pine, Hardwood, Combi
Glue	EO, E1, E2, MR, WBP, MELAMINE
Size	1220*2440mm 1250*2500mm 610*2440mm 1220*1220mm and other any cutting size
Thickness	2.0mm-50.00mm
Packing	Inner packing: Inside pallet is wrapped with a 0.20mm plastic bag. Outer packing: Pallets are covered with PLYWOOD/MDF/CARTON and then PVC/steel tapes for strength
Transport	By break bulk or container(Qty: 8plts/22m³/20GP, 16plts/48m³/40GP, 18plts/54m³/40HQ
MOQ	54m³/Order
MSQ	5000m³/Month



UV Birch Plywood








Birch Plywood







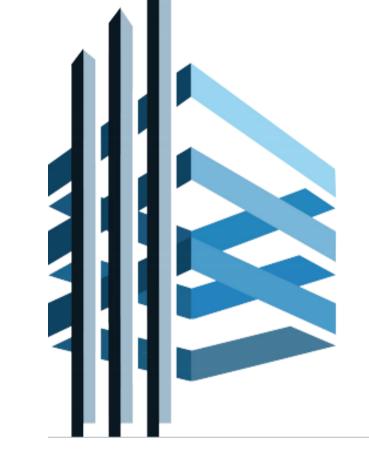

AUST TECH **ENGINEERING & SUPPLIES PTY LTD**

Pencil Cedar Plywood

NDOR WALL PANEL

123 Wave Board


158x17 Round Holes

180 Special-shaped

Wooden grain surface pvc wall panel can be used for decoration. WPC wall panel has a series of advantages over other wall panels and has become increasingly popular in recent years.





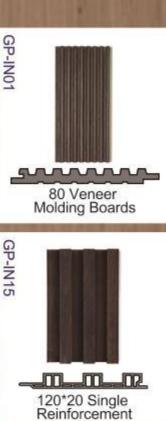

00000

170x18

Light Color



~~~~~~








250x10 Black

Walnut Half Covered

118 Small Grille

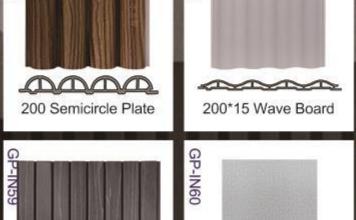






2222

159 Inner Circle

0.0.0000

180x16 Half Coated



150x7.8 Solid

20000

160x15 Semi-round

Light Coated Film

187x30 Grille


44----


Light Coated Film 200*8






217x14 Three Round Plates





230x50


Special-shaped Plate




























WPC DECKING WOOD PLASTIC COMPOSITE

Wood-plastic wallboard can be directly installed on the outer wall of the house, which can save a large part of labor costs and additional decoration costs. Outdoor wpc wall panel can make the house more stable and increase the practicality and aesthetics of the house.



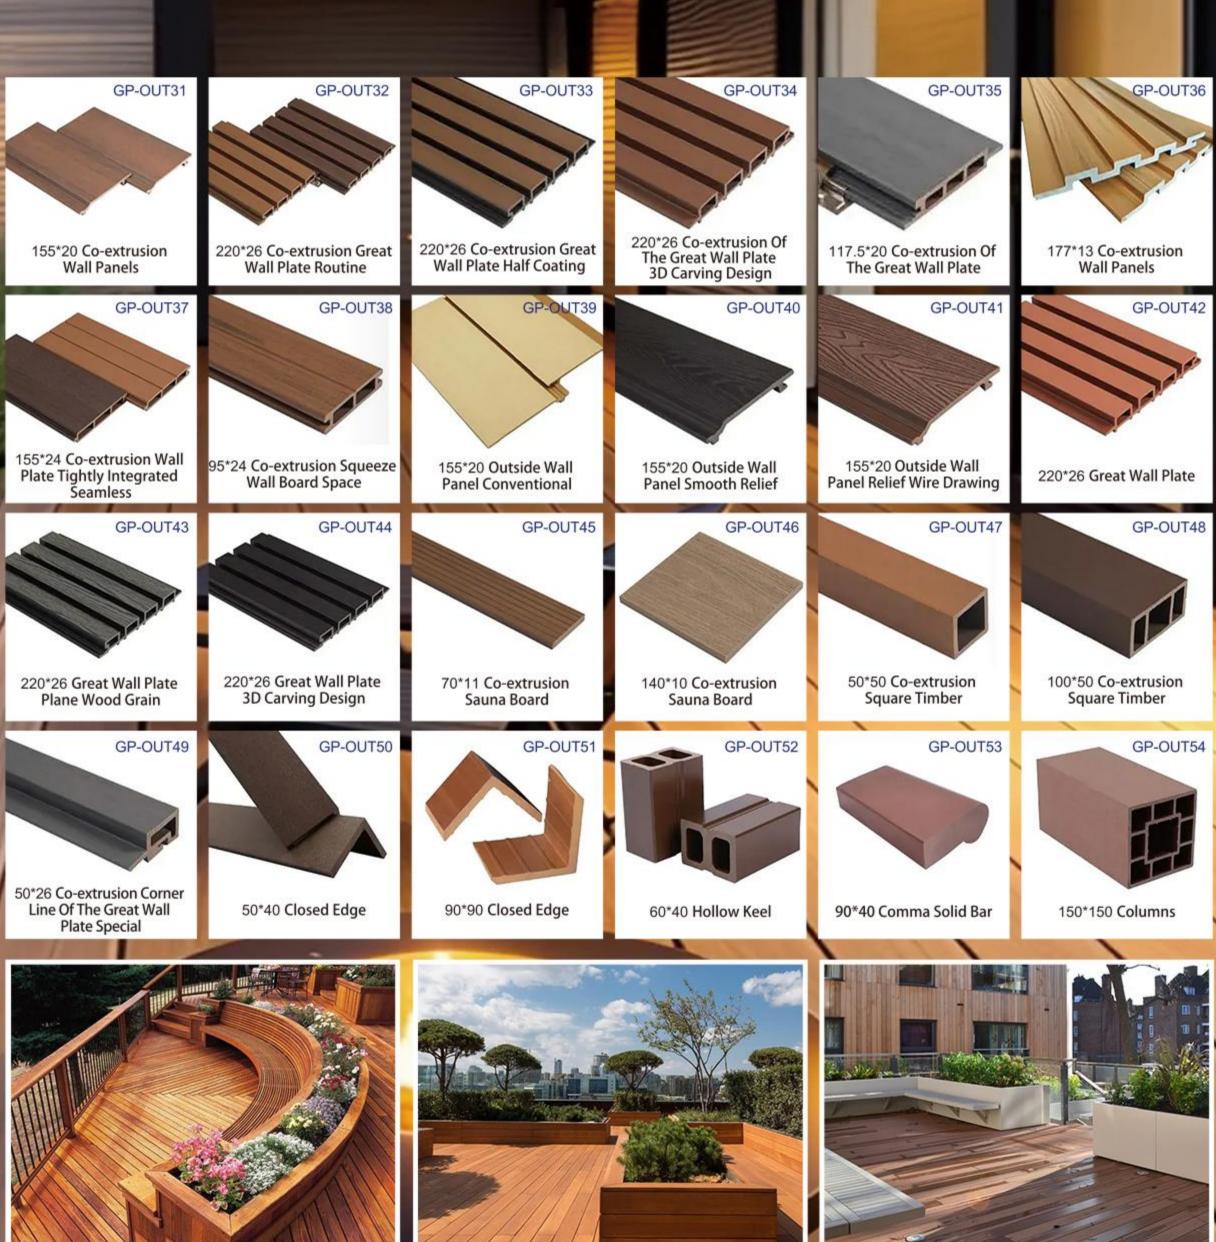

Wear Resistant UV Board












Environmental F protection re

eant

Goo

UV wall board rich in colors and designs, it is strong, durable, wear resistant to be used. It is high gloss, if you use it to decorate house, hotle, commercial place, it will enhance the atmosphere of the place. Places look more beautiful. Most importantly, It is fireproof and flame retardant, you can use it with confidence.


UV Background Wall _____

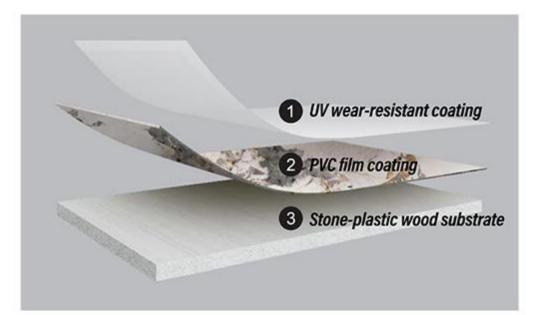

Length and width: Single piece size within 1220*2900 mm can be customized Thickness: 2mm,2.5mm,2.8mm,3mm,3.2mm,3.5mm,3.8mm,4mm,5mm


Surface process: Bright or matte Environmental protection grade: E0

Fire rating: B1

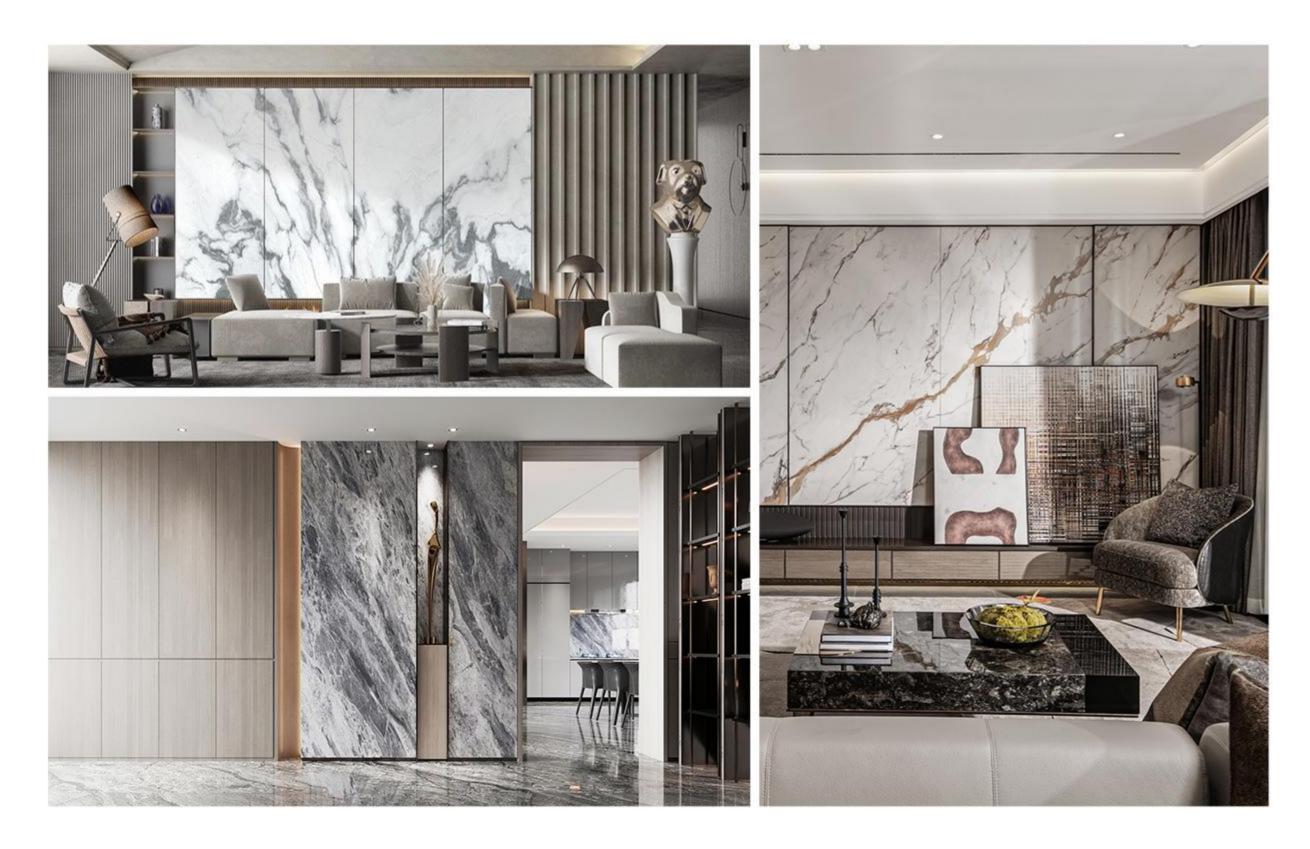

MULTIPLE COLORS _____

Our UV boards rich in colors and designs, the following are just a few of the colors. We also have many other different colors of UV board. If you want your own design, we also can customized for you as you want.

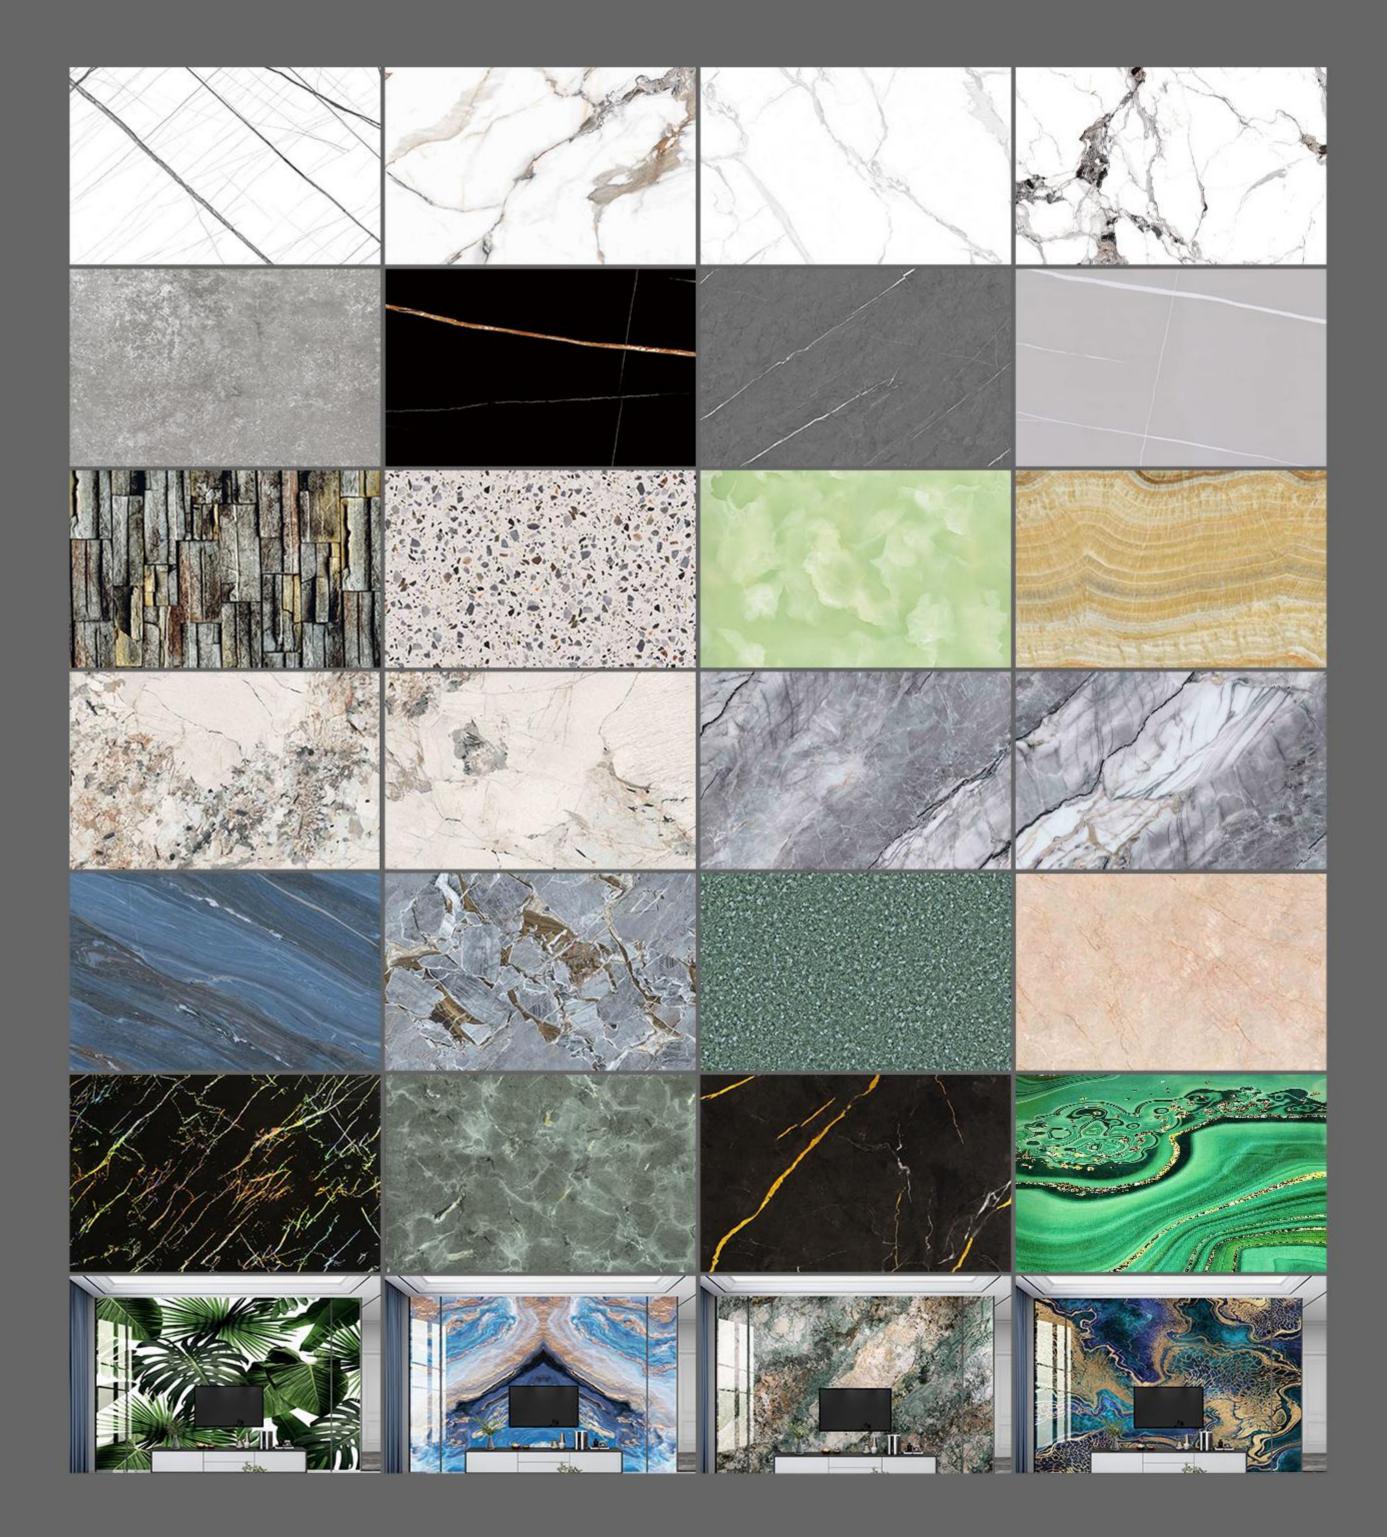

Wear Resistant **SPC Flooring**


SPC flooring is a new type of environmentally friendly flooring, which is waterproof and wear-resistant, making it perfect for families with children and elderly people. SPC becomes the preferred environmentally friendly flooring for indoor decoration.













UV Layer Wear Layer Color Films SPC Core Foam or Cork (optional)

Thickness	3.5mm, 4mm, 4.5mm, 5mm, 6mm
Wear Layer	0.1mm, 0.2mm, 0.3mm, 0.4mm, 0.5mm
Size	1220*182mm / 1220*150mm / 910*150mm / 1220*230mm / 1525*230mm cutomized
Installation	Click lock
Underlay Form	1mm / 1.5mm / 2mm EVA & IXPE


Surface:







Size: pls check the following sizes, also customized

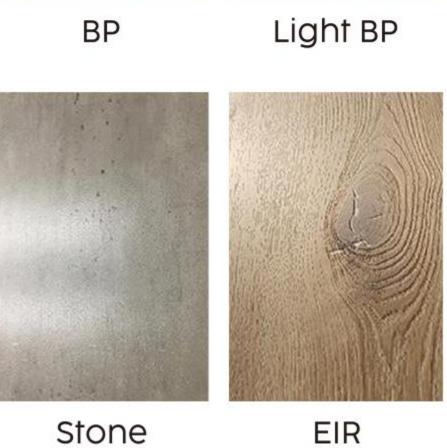



Surface:













Little Emboss

Wood Emboss

Crystal Emboss

Middle Emboss

Glossy EIR

Wear resistance:

AC1	AC2	AC3
Class 21	Class 22	Class 23
Residential low utilization	Residential middle utilization	Residential high utilization
AC3	AC4	AC5
Class 31	Class 32	Class 33
Commercial low utilization	Commercial middle utilization	Commercial high utilization



SPC flooring accessories:



SPC Quarter Round 2400*28*15









SPC T-Moulding 2400*45*6



Laminate flooring accessories:





SPC Stair Nose 1 2400*55*18





End Cap 2400*35*12mm

T-Molding 2400*45*10mm









Quarter Round 2400*28*15mm Reducer 2400*45*12mm

Bamboo Charcoal **Wood Veneer**













E0 level environmental protection + Type A board substrate






Bending and shaping



Waterproof and moisture-proof

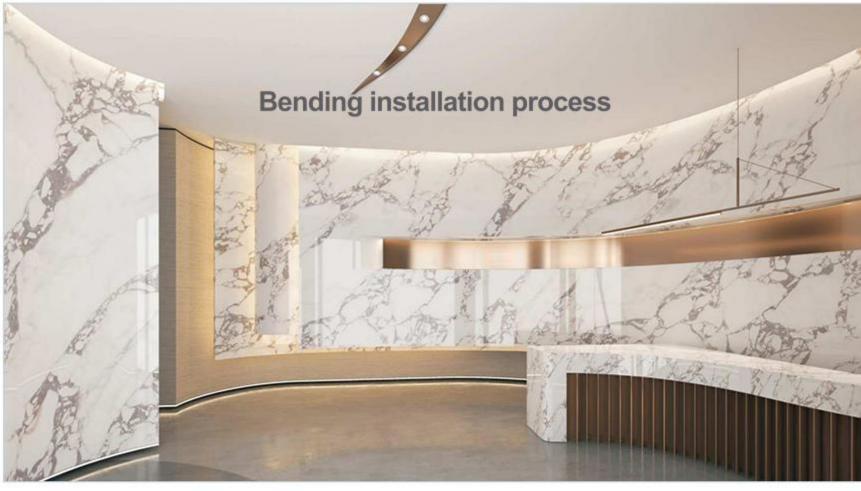





Corner slotting and bending

- Slotting of trimming machine
 Hot air gun heating bending
 Apply structural adhesive on the back of the wall panel

Apply structural adhesive on the back

- 1 Apply structural adhesive on the back2 Metal profile connection
- 3 Puttying and leveling

PU Stone Wall Panel

Polyurethane stone (PU STONE) is a manufactured faux stone product. Polyurethane faux stone was designed to make a realistic looking stone panel that is extremely easy to install.



Decorative 3D Fluted interior PS Wall Panel

PS wall panels are made from polystyrene (PS) and have low

density, making them lightweight with good sound and thermal

insulation. Widely used in construction and decoration, they

are easy to install, durable, and have good seismic resistance.














Eco-Friendly

VARIOUS STYLES

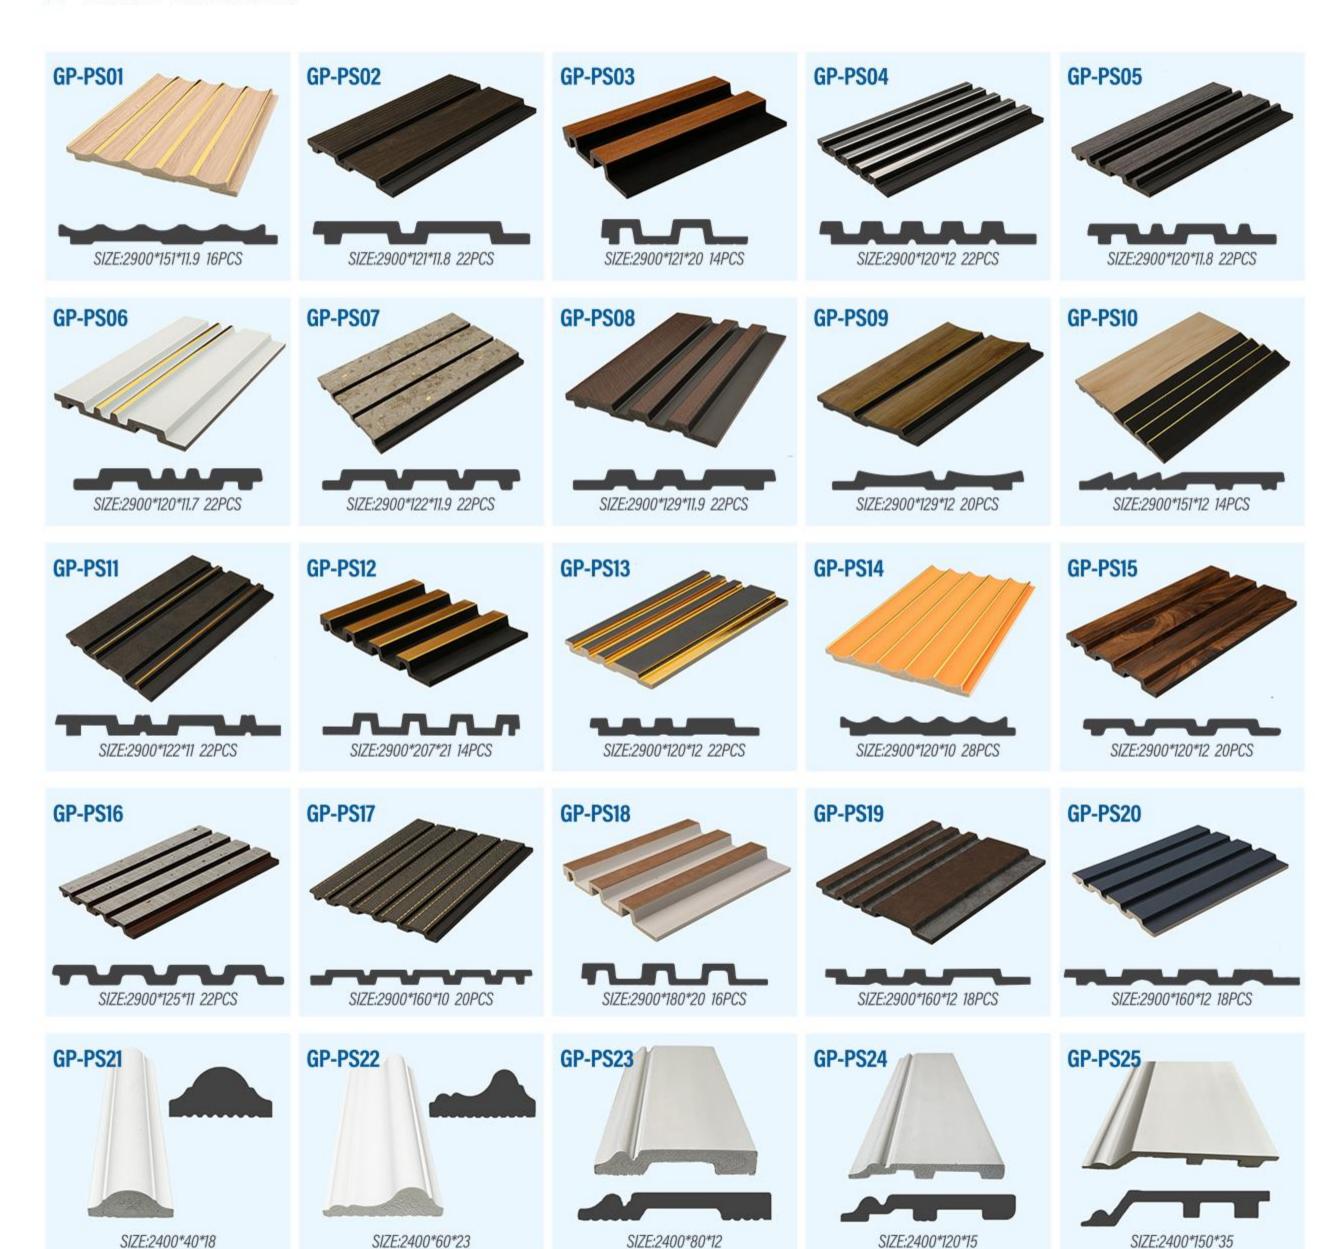

Soft Porcelain

8110-6

8101-2


8102-3

8103-6

8106-2

8115-3

The production process of soft porcelain is pollution-free and zero-emission, and the materials can be recycled. It is a new type of green building materials with energy saving, environmental protection and low carbon, and has broad market prospects and good social and ecological benefits.

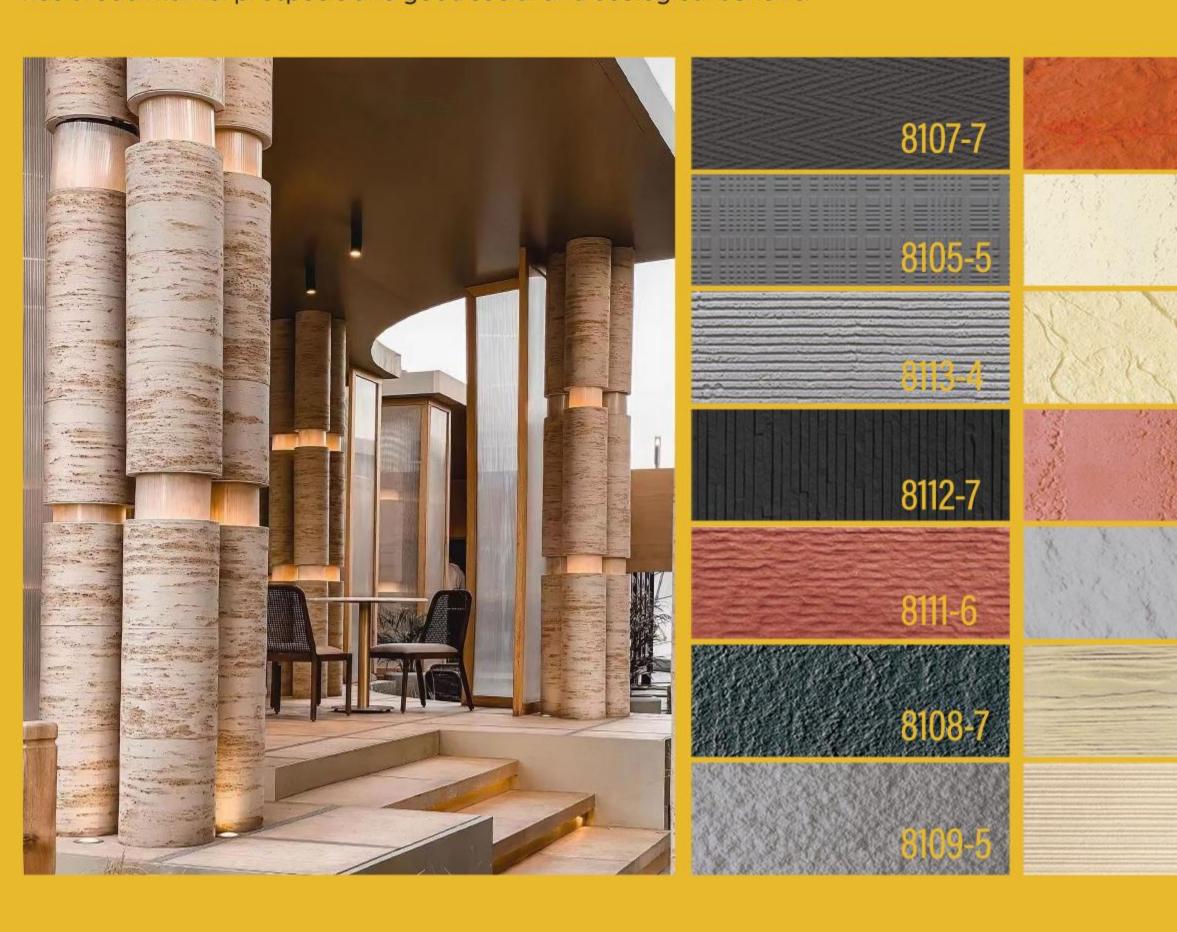

Sound-Absorbing Board

Each sound-absorbing panel is handmade, which not only enhances the sense of decoration visually, but also creates a quieter and more comfortable environment.



PVC wood grain

film (straight strip)





veneer(straight strip) veneer(straight strip)







Engineering

Engineering Case Diagram

Case Diagram

High Quality

PVC Panel/Ceiling/Wall Panel

PVC Panel can be for ceiling and wall panel, which is made of polyvinyl chloride resin as a base material. The finishes are common printing, hot stamping and laminating. High shinky surface and smooth. There are various colors and patterns.











Easy to install

Width

200mm,250mm,300mm,350mm,400mm,595mm,600mm,605mm

5mm.6mm.7mm.7.5mm.8mm.8.5mm.9mm.10mm.12mm

2.0kg/sqm ~ 5.0kg/sqm

A large number of designs are available

VARIOUS STYLES

Can be customized











- Q: Can I get your samples?
- A: Yes, of course. If your want get some samples for testing, pls contact us.
- Q: How do you guarantee the quality of your product?
- A: We have our own QC team, every step is strictly controlled. All the products are inspected before packing and loading.
- Q: How can we guarantee quality?
- A: Always a pre-production sample before mass production, always final inspection before shipment.
- Q: What's your payment terms?
- A: T/T, Irrevocable L/C at sight.
- Q: What's the delivery time?
- A: It depends on the order quantity, normally 15~30 days.

