


MVAVA

2024

SMART CAMERA

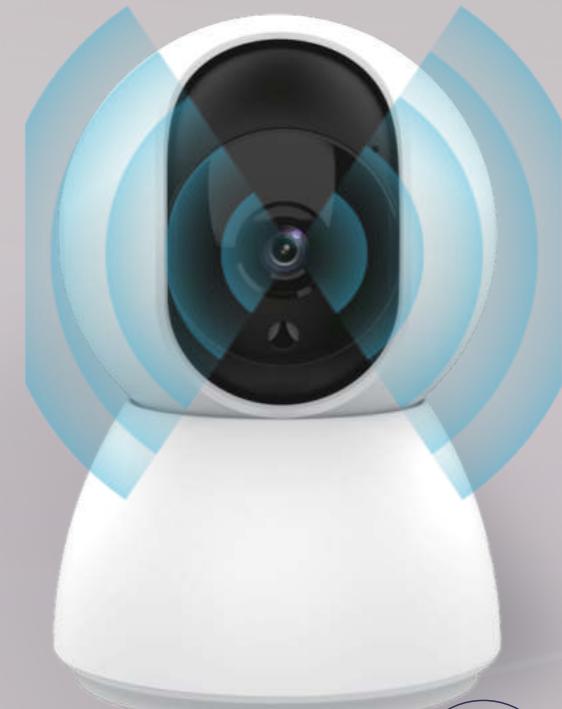

NEW SMART HOME SERIES

MVAVA

MANUFACTUR:WENZHOU MVAVA TECHNOLOGY ELECTRICAL CO.,LTD
NO.529,16th Avenue Binhai ,Economic and Technological Development Area,
Wenzhou,Zhejiang , China 325000
Tel:0086 577 88872223 88807227
www.mvava.com E-mail:mvava@mvava.com

Safeguard your home and store

Brand Concept

MVAVA's Smart home products, simple, and human-oriented, are far above others, with many patents fully showing their complete functions and durability. The brand spirit and personality element make MVAVA a top brand in international industry. Every series has its soul and personality and realizes elegant fusion of home space. Considering people's feeling and need, MVAVA keeps trying to make things simpler with unique design, perfect technique, top materials and sophisticated construction. And every product is perfection from every angle, even for the smallest details. And defection or compromise is not allowed in MVAVA, even inside out of sight. We are not only bring the best products to the whole world but also make MVAVA one of the best global manufacturers.

MVAVA is on behalf of noble taste and leads the world in the development of control equipment. Sticking to business philosophy of simplicity, originality, personality and humanity, MVAVA provides perfect solution with superb technology, unique design and verified products, and integrates diverse control in smart home bule prints.



CONTENTS

Smart Power Strip	01 - 04
Smart Plug	05 - 08
Smart Thermostat Valve	09 - 18
Smart Control Panel	19 - 20
Smart Module Switch	21 - 24
Smart Sensor	25 - 38
Smart Gateway	39 - 40
Smart Camera	41 - 64
Smart DoorLock	65 - 74



- Remote Control
- Voice Control
- Set Schedule
- Electricity Monitoring

Electricity Monitoring

Surge Protection

No Hub Required

Device Sharing

Individually controlled
sockets



ios Android Works with Amazon Alexa Smart Life Works with Google Assistance tuyā





Smart Power Strip

European Type
4 plus Extension Lead

ios Android



- Electricity Monitoring
- Surge Protection
- No Hub Required
- Device Sharing
- Individually controlled sockets

-  Remote Control
-  Voice Control
-  Set Schedule
-  Electricity Monitoring

Works with Amazon Alexa

Smart Life


Works with Google Assistant

tuya





Smart Life Tuya Amazon Alexa Google Assistant

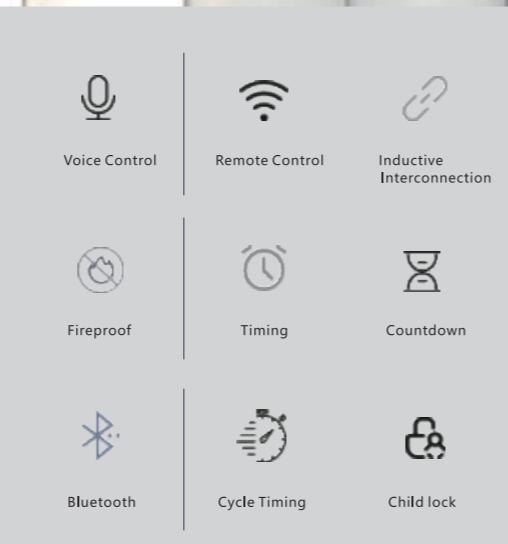

ios
Android

Smart Power Strip

Model:U412-4U

American Type

4 plus Extension Lead

Size:335 x31 x65mm



Model:U601-3U

American Type

6 plus Extension Lead

Size:226x90 x30mm



Model:U401-3U


Universal Type

4 plus Extension Lead

Size:290x65 x42mm

Remote Control

Turn on your water heater in advance, enjoy a lot shower when arrived

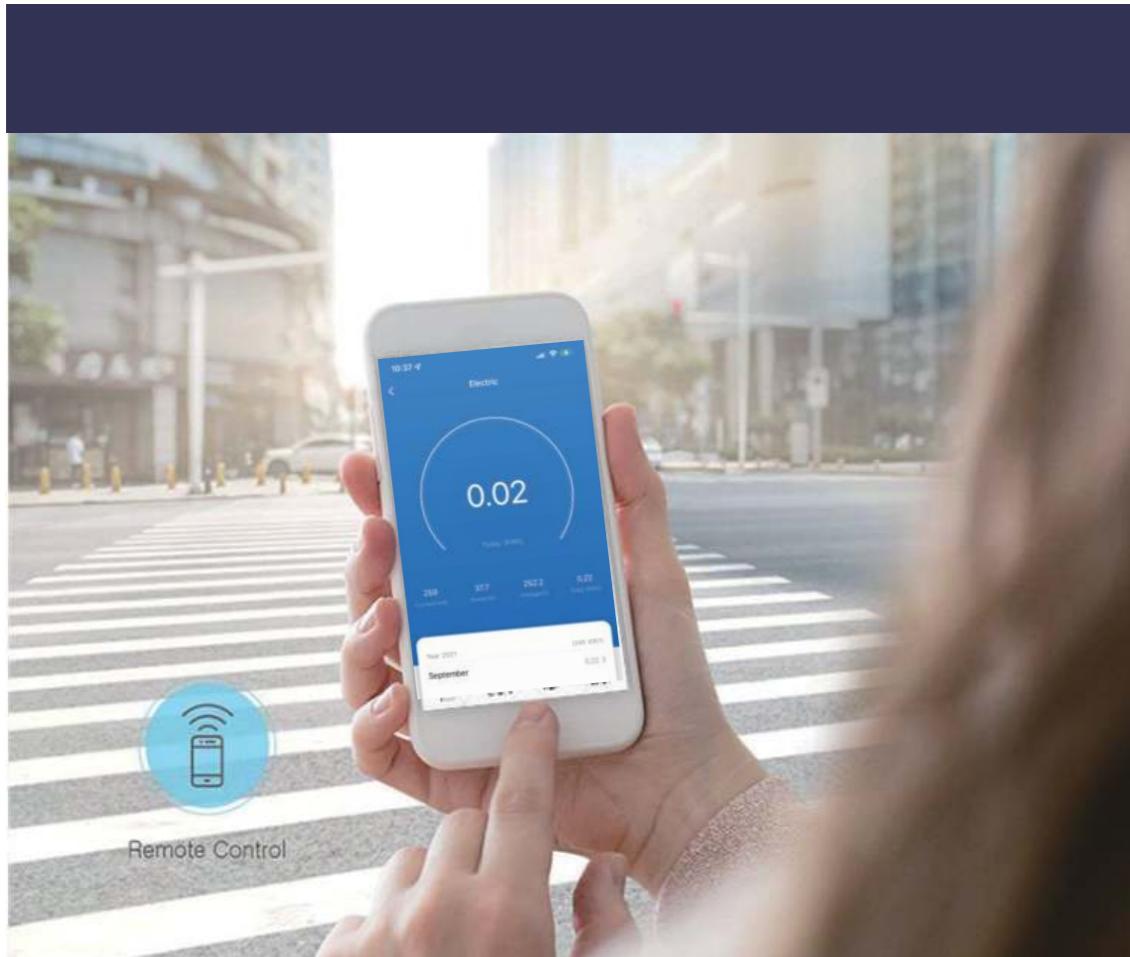

Smart Plug




American Type Max Power:2200W

Smart Socket

Fire Retardant PC

- *This socket is a 10A wifi smart socket, using the Tuya smart solution.
- *Support smart audio voice control such as Tmall Genie.
- *Mobile phone time delay switch.
- *Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- *The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- *The whole family shares the equipment, multiple users can view at the same time.
- *Can be used for electrical appliances with power below 2200W.
- *Imported fire retardant materials, safe and reliable.

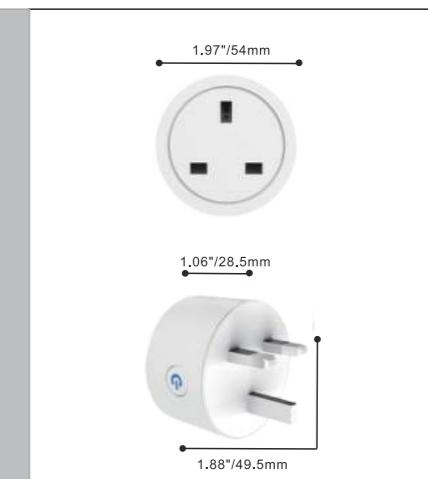

European Type

Smart Socket

Fire Retardant PC

- *This socket is a 16A wifi smart socket, using the Tuya smart solution.
- *Support smart audio voice control such as Tmall Genie.
- *Mobile phone time delay switch.
- *Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- *The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- *The whole family shares the equipment, multiple users can view at the same time.
- *Can be used for electrical appliances with power below 2200W.
- *Imported fire retardant materials, safe and reliable.



K02-16A

Max Power: 3680W



K03-16A

Input voltage: AC100-240V 50/60Hz
 Maximum current: 16A
 WiFi standard: 2.4GHz 802.11b/g/n
 Surge protect: 140J



MTV01



MTV02



MTV05



MTV04


Smart Thermostat

M8000C



Efficient Customization One-stop Procurement

Temperature controller manufacturer

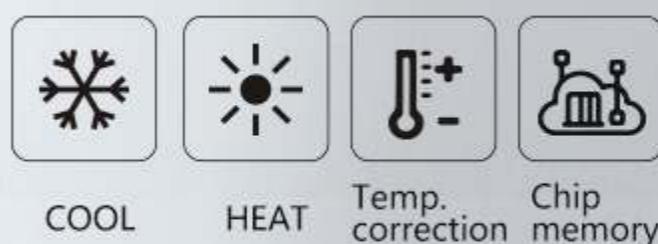

COOL

HEAT

Temp.
correction

Chip
memory



White



Black



Grey

4.8" Screen
Remote Control

Screen size **4.8 "** Visible thickness **2cm** Heat emission hole **54pc**

Power Supply	• 24VDC/AC +10%
Current Load	• 1A (Inductive) 3A (Resistance)
Sensor	• NTC3950, 10K
Set Temp. Range	• 42-122 °F (5-50°C)
Accuracy	• ± 1 F
Display Temp. Range	• 41-210 °F (5-99°C)
Ambient Temp	• 32-113 °F (0-45°C)
Ambient Humidity	• 5-95%RH(Non Condensing)
Storage Temp	• 23-113°F (-5-45°C)
Timing Error	• <1%
Power Consumption	• <1.5W
Shell Material	• PC+ABS(Fireproof)
Available Installation 1	• Wall mounted
Available Installation 2	• Distance of 62±5mm (Europe, China and Japan)
Available Installation 3	• Hole Distance of 86±3mm (USA and Italy etc.)
Wire Terminals	• Wire 2x1.5mm ² or 1x2.5mm ²
Protection Class	• IP20
Buttons	• Capacitive Touch Buttons

Smart Thermostat

Thermostat



MEMORY PROTECTION



MHT0006




MHT0003



White

Black

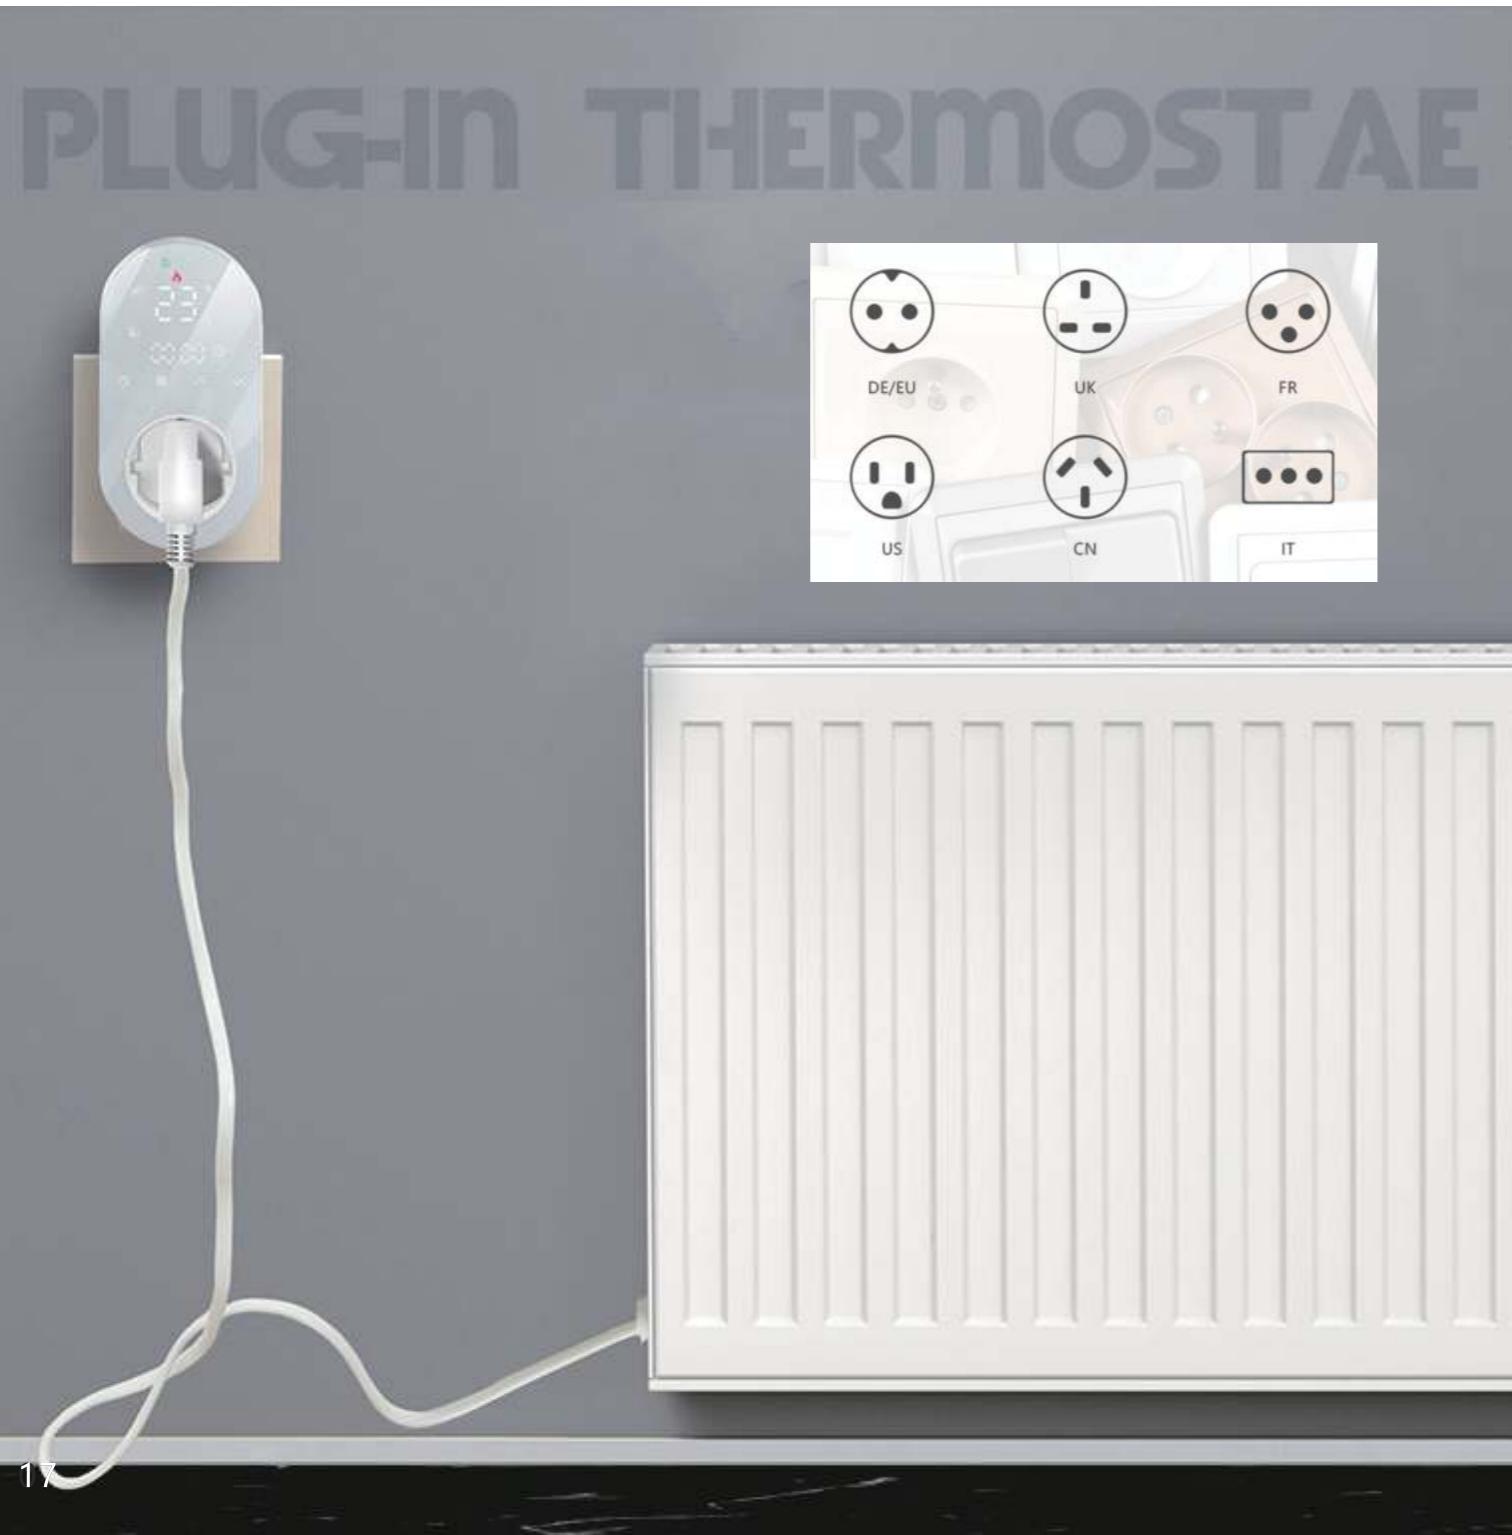

MLED-B12



MLCD-B2



Smart Knob Thermostat

Suitable for water and electricity boiler heating system

TFT true color screen . Knob temperature control
Nine categories of options control



Stand By Screen

Master Control

Satin Silver



Satin Gold

Satin Black

- Simple in wall installation.
- 6-inch HD LCD, IPS, multi touch screen, quadruple microphone with noise reduction, Auto light sensor, built in 1W speaker.
- ZigBee gateway function, APP remote control.
- Control the lights, curtains, air conditioners, and all other Smart Home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen.



MCP03-6"Type Grey



MCP01-86Type



MCP02-118Type



Smart Module Switch

Remote Control Voice Control
Set Schedule Electricity Monitoring



M-1CH
1 Gang Switch



M-2CH
2Way Switch




M-3CH
3Way Switch



M-4CH
4Way Switch



M-1CM
1Way Curtain Switch

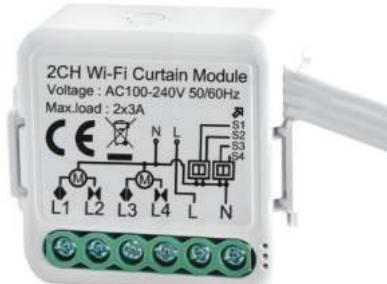


M-2CM
2Way Curtain Switch




M-1DM
1Way Dimmer



M-2DM
2Way Dimmer

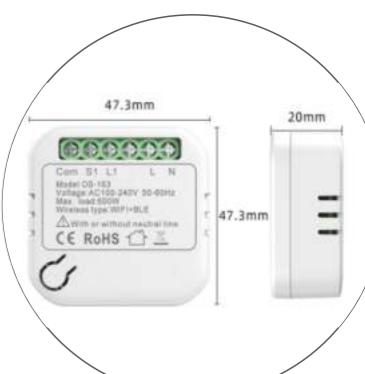

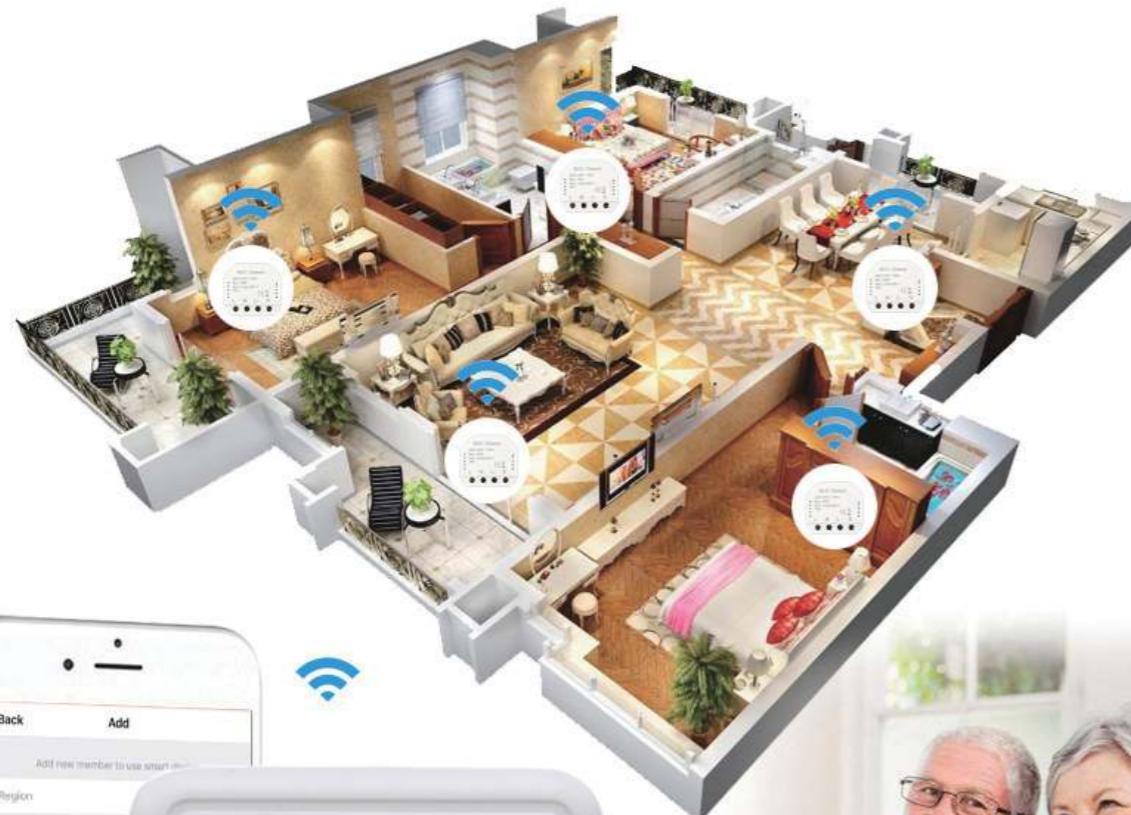

Smart Module Switch

Remote Control Voice Control
Set Schedule Electricity Monitoring



MZ-1CH
1Way Switch



MZ-2CH
2Way Switch



MZ-3CH
3Way Switch



MZ-4CH
4Way Switch



MZ-1DM
1Way Dimmer



MZ-2DM
2Way Dimmer



MZ-1CM
1Way Curtain



MZ-2CM
2Way Curtain



MZ-1CH-L
1Way Switch Single Live



MZ-2CH-L
2Way Switch Single Live



MZ-3CH-L
3Way Switch Single Live



Zigbee Combustible Gas Sensor



MV09270

- When detected gas leakage will alarming and send out signal to gateway.
- Working Voltage: AC85V-250V
- Average Consumption: $\leq 1.5W$
- Alarm Sound: 70db (1meter)
- Alarm Density: $7\%LEL \pm 3\%LEL$ (CH4)
- Zigbee standard :IEEE802.15.4
- Zigbee working frequency: 2.400GHz-2.484GHz



Zigbee PIR Motion Sensor



MV09266

- USB Input voltage: DC5V/ 2A
- Battery Input voltage: DC3V Lr03
- Static Current: $\leq 35\mu A$
- Working current: $\leq 15mA$
- Low-voltage notification: $\leq 2.4V$
- Zigbee operating frequency: 2.400GHz-2.484GHz
- Detecting Distance: 6M
- Detecting Angle: 360°Ceiling Mounted
- Working Temperature: $-10\sim +50^{\circ}C$



Zigbee Water Leakage Detector



MV09271

- When detected water leakage will send out signal to gateway.
- Input Voltage: DC3V CR123A
- Standby Current: $\leq 10\mu A$
- Alarm Current: $\leq 75mA$
- Low-voltage: $\leq 2.5V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection method: Water detection
- Working Temperature: -10- +50°C
- Working Humidity: $\leq 95\%RH$

Zigbee Smoke Detector



MV09269

- When detected smoke leakage will alarming and send out signal to gateway.
- Input voltage: DC3V Lr03
- Quiescent current: $\leq 35\mu A$
- Working current: $\leq 100mA$
- Low voltage and under-voltage: $\leq 2.4V$
- Alarm sound pressure: 85db/1m
- Zigbee standard: IEEE802.15.4
- Working frequency: 2.405 ~ 2.480GHZ
- Detection range: 20m²

Zigbee Temperature Humidity Sensor



Mv09268



- Product parameter: DC3V Lr03
- Quiescent current: ≤10uA
- Alarm current: ≤15mA
- Low voltage and undervoltage: ≤2.6V
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: -10°C ~ +60°C
- Detection humidity: 0-100%RH
- Working temperature: -10-50°C
- Working humidity: maximum 95%RH



MV09267



- Product parameter: DC3V Cr2450
- Quiescent current: ≤10uA
- Alarm current: ≤15mA
- Low voltage and undervoltage: ≤2.6V
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: -10°C ~ +60°C
- Detection humidity: 0-100%RH
- Working temperature: -10-50°C

Zigbee Human Motion Sensor



MV08229

Detection distance : 7-10M
 Detection angle : Wide angle 120°
 Battery: 3V Cr2450
 Operating Temperature : -10°C-55°C
 Working humidity : 10%-90% RH (Non-condensing)
 Main function : Intelligent linkage
 Wireless Standard : WIFI802.11b/g/n Zigbee802.15.4
 Housing material : ABS



MV09272

Wi-Fi Combustible Gas Sensor


Input voltage: AC 85V-250V
 WiFi Standard: 802.1 1b/g/n
 Alarm concentration: 6% LEL ± 3% LEL (Ch4)
 Average Consumption: ≤1.5W
 Alarm Sound: 70dB/m
 Working Temperature: -10°C -- + 50°C
 •Working Humidity: ≤95%RH
 •Product Size: 55*48*30mm



MV08917

Wi-Fi Smoke Detector

Power supply : DC9V alkaline battery (6LR61)
 Static current : <10uA
 Alarm current: <100mA
 Working temperature : 0°C ~ +50°C
 Humidity : ≤95%RH , no freezing
 Alarm sound : >80dB
 Low battery alert : ≤7.0V±0.2V

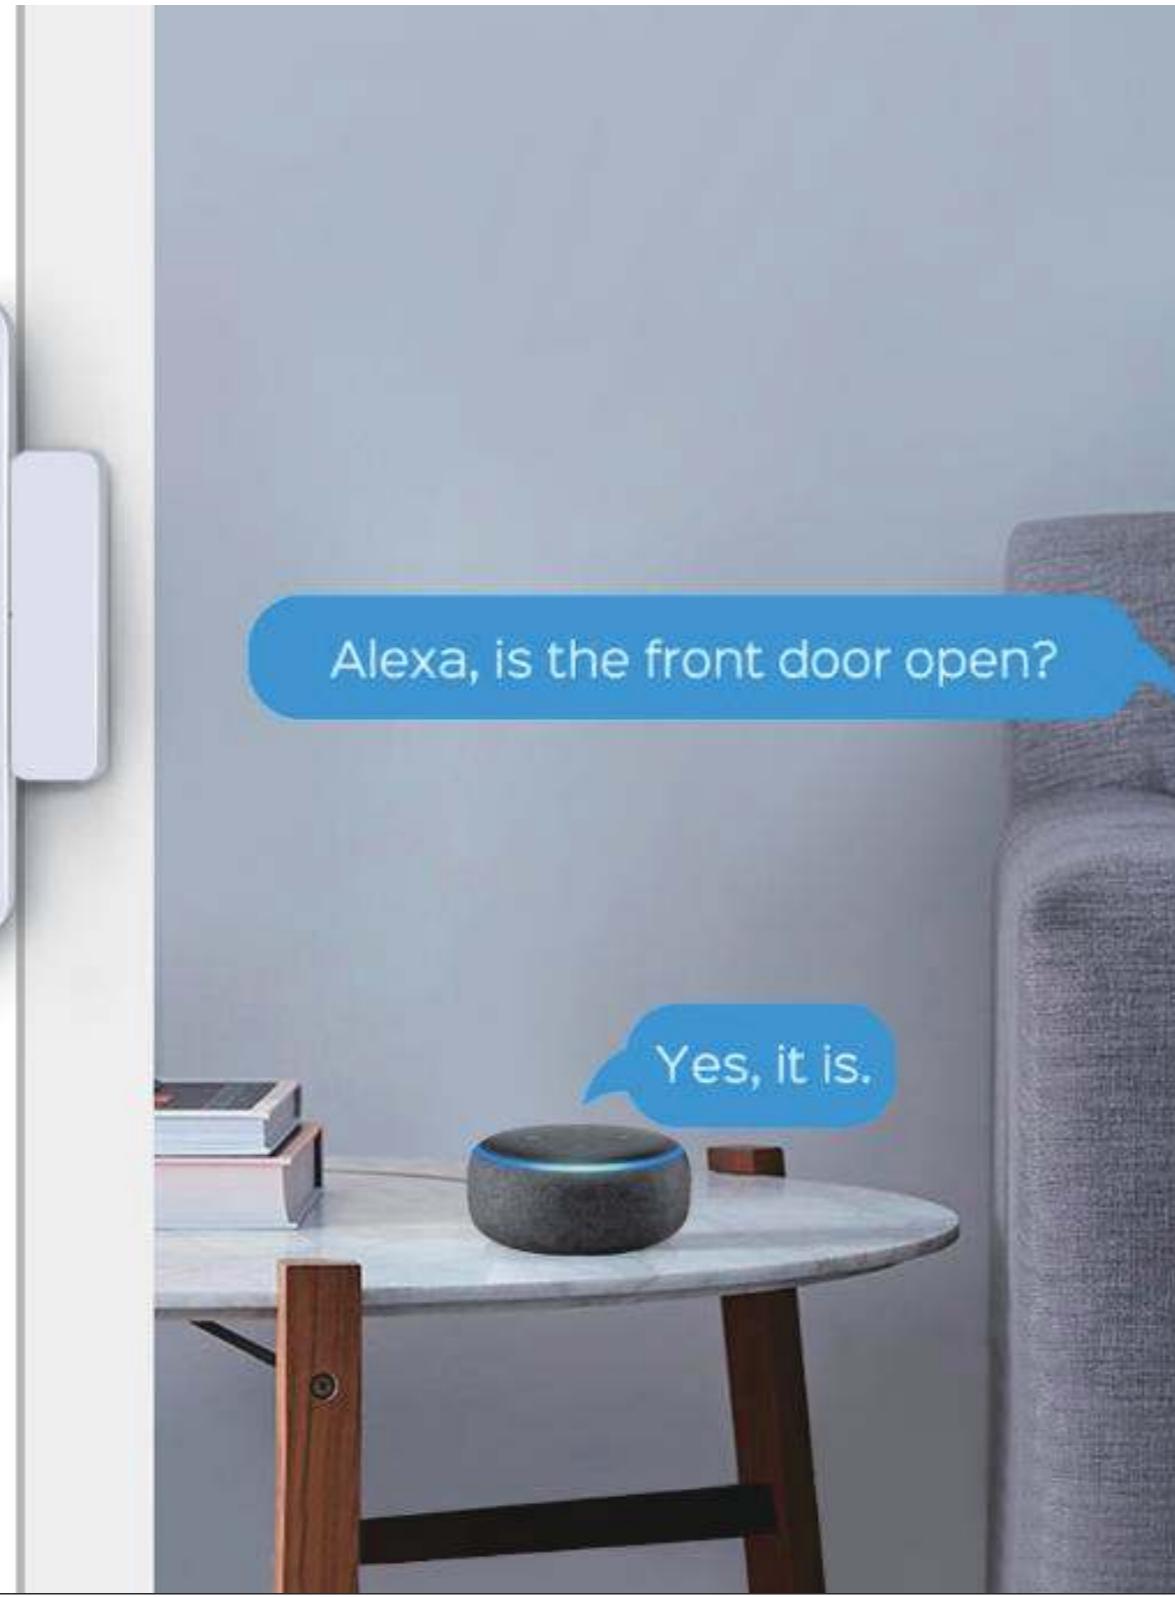

Wi-Fi Door Window Sensor
MV08362

Battery: LR03-1.5V/AAA*2 (Alkaline battery)
 Battery Life: 6000 times trigger Standby
 Current: 8uA Alarm
 Current: 70mA ~ 120mA Wireless
 Type: 2.4GHz Wireless
 Standard: IEEE 802.11b/g/n
 Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
 Working Humidity: 20% ~ 85% RH
 Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)



Zigbee Door Window Sensor
MV09265

Input voltage: DC3V LR03*2
 Standby current: ≤10uA
 Alarming current: ≤15mA
 Low-voltage notification: ≤2.5V
 Zigbee frequency: 2.400GHz-2.484GHz
 Magnetic control distant: ≥15mm
 Working temperature: -10-50°C



MV08062 WiFi/Zigbee



MV08533 WiFi/Zigbee

Wi-Fi IR Remote Control Sensor

- * 360° Full Range Coverage
- * Mobile Phone Remote Control
- * Support Smart Voice Speaker
- * Support Timer Function
- * Smart Learn Function & DIY



MV08360A




MV08360B



MV08360C

Zigbee IR Remote Control Sensor

- * Material : ABS
- * Micro Input : DC 5V/1A
- * Standby Current: ≤ 15mA
- * Infrared Frequency: 38 KHz
- * Infrared Transmission Current: ≤ 110mA
- * Infrared Range: ≤ 12 meters
- * Wi-Fi frequency: 2.4GHz IEEE 802.11 b/g/n
- * Zigbee frequency: IEEE 802.15.4
- * Support third-party Voice Control : Amazon alexa, Google Assistant

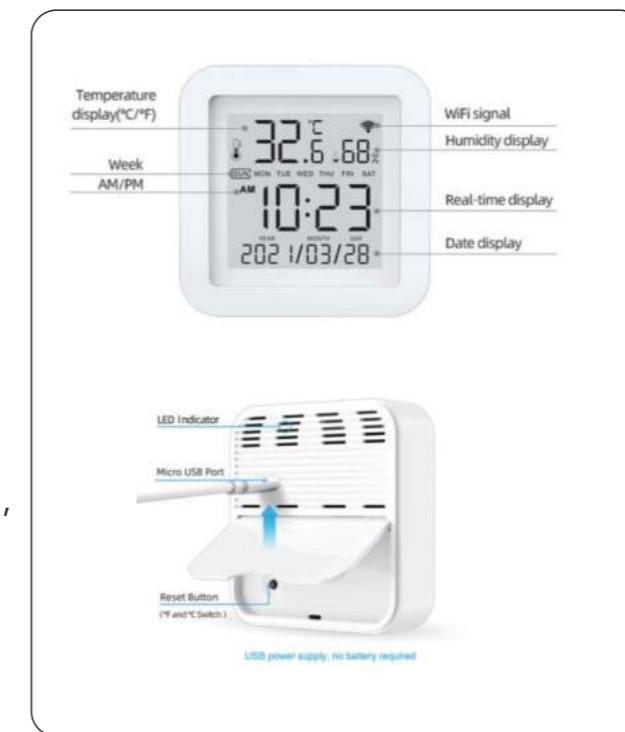

Size: 65*65*17mm
 Micro Input: DC 5V/1A
 LED Indicator: Blue
 Wi-Fi Protocol: 2.4GHz
 Wi-Fi Standard: IEEE802.11 Bb/g/n
 Temperature measure range:0°C~60°C
 Temperature Accuracy: ±1°C



Smart Water Sensor

MV08735

Battery: LR03-1.5V/AAA*2 (Alkaline battery)
 Battery Life: 6000 times trigger
 Standby Current: 8uA
 Alarm Current: 70mA ~ 120mA
 Wireless Type: 2.4GHz
 Wireless Standard: IEEE 802.11b/g/n
 Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
 Working Humidity: 20% ~ 85% RH Storage
 Temperature: 0°C ~ 60°C (32°F ~ 140°F)
 Storage Humidity: 0% ~ 90% RH
 App: Tuya smart or Smart life
 Supports: Android 4.4 and iOS 8.0 or newer
 Size: Sensor: 71mm x 25mm x20 mm S
 Sensor Cable: 1m
 Material: ABS
 Patent No.: 201930649295.9



PIR Motion Sensor



MV08361

Wi-Fi Connection / High accuracy / Large detection range

Size: 70*45*35.6mm
 Battery: LR6-1.5V/AA*2(Alkaline battery)
 Micro Input: DC 5V/1A Detect Angle: 128°
 Detect Distance: ≤8m
 WiFi Type: 2.4GHz
 WiFi Standard: IEEE 802.11 b/g/n
 Working Temperature: 0°C~50C
 Working Humidity: 10%~85% RH
 App: Tuya Smart or Smart Life
 Support Android 4.4+or iOS 8.0+ version Includes Micro charging cable, adhesive tape and screws





Smart Zigbee Wireless Gateway

MZG01

Product specifications

Appearance size :61*61*15mm
Weight: Net Weight 33g
Status indicator :1 Power indicator,1 Network indicator
Operation buttons :1 button (reset)
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
IEEE 802.15.4 2.4~2.485Ghz
Zigbee 3.0



Smart Multi-Mode Gateway

MZG03

Product specifications

Appearance size :60*60*15mm
Weight: Net Weight 32g
Status indicator :2 LED (Wi-Fi/Zigbee/Bluetooth)
Operation buttons :1 button (reset)
Power supply :MicroUSB DC5V
Working current :<1A
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
Hardware interface :1 Micro-USB
Wireless technology
IEEE 802.15.4 2.4~2.485Ghz
Zigbee 3.0 / BLE5.0



Smart Zigbee LAN Gateway

MZG02

Product specifications

Appearance size :92*92*25.5mm
Weight: Net Weight 100g
Status indicator :4 LED (Green)
Operation buttons :2 button (reset)
Power supply :MicroUSB DC5V
Working current :<1A
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
Hardware interface :Micro-USB, 1 LAN Interface
Wireless technology
IEEE 802.15.4 2.4~2.485Ghz

Someone passed, get mobile notification

Arm the detector, the sensor detects that someone has passed, send the alarm alert to your mobile in real time.



Someone passed, light turn on

Work together with smart switch, it automatically lights up when people pass, convenient and saves electricity!



High-decibel audio alarm

The high-decibel alarm scares off the intruder




Real-time monitoring with smart camera

After detecting someone passing, the camera 360° real-time video can watch the monitoring screen in real time through the mobile APP.



IP65 Waterproof Level

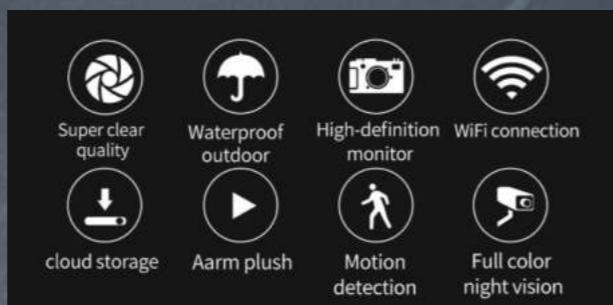

MTYP2

Smart Wireless Camera

IP65 Series



MTYT8



MTYD6

Features:

- *H.265 compression format, real-time monitoring and high-definition
- *Dual Light PCB designed, Two way Audio, Full color night Vision
- *3.0MP real-time image transmission, adaptive network, smooth experience
- *up to 25 frames per second
- *Echo cancellation and noise suppression technology, perfect full-duplex voice effect
- *With Amazon cloud penetration technology, one-key remote, plug and play

Intelligent Mobile Tracking

—MOBILE TRACKING—

Intelligent recognition of the human body, detect the dynamic lens automatic tracking



Smart HD Camera

Multiple Storage Methods

MSHDC-02

1080P PTZ Smart WiFi Camera

1080P HD Quality



Features:

- * 1080P PTZ smart camera
- * Support WIFI function, 2dB antenna
- * Two-way voice intercom function
- * Excellent Adaptive Night Vision Automatic Function
- * 15m infrared night vision, low light environment, details are clearly visible
- * 360° full viewing angle, pan/tilt function, horizontal 355°, vertical 100° flexible rotation
- * Support automatic/alarm/timed recording
- * Humanoid automatic tracking function
- * Support multi-terminal real-time viewing
- * Support online operations on major platforms, support



1. TF card storage
Support up to 128G TF card



2. Cloud storage
Device activity video can be stored in the cloud and viewed anytime, anywhere



3. NVR storage
Support onvif protocol



HD Quality

1080P PTZ Smart WiFi Camera

1080P HD Quality



Description:

- * Two-way intercom * wireless intelligent connection
- * 360-degree HD monitoring
- * Motion detection, intelligent alarm
- * Professional infrared filling lamp system
- * Support 2 million night vision lenses, 2 million high resolution images, fine texture
- * Focal length 3.6mm, daytime visible range of 30m, night vision range of 20m
- * Intelligent qos algorithm automatically adjusts bit stream and frame rate, adaptive network, bringing perfect video experience
- * Support tf card storage, the maximum memory expansion to 128G, can be played at any time, video editing



Smart HD Camera

E27 Camera

HD Quality

WiFi 360 Panoramic
Light Culb Camera



MTYP2V

Features:

- *Simple installation, E27 lamp holder can work;
- *360 degree panoramic picture, the picture can change the angle arbitrarily;
- * Million pixels, h.265 compressed format;
- *Duplex call, humanoid trigger alarm
- *Support 4x digital zoom



MTYP5V

Features:

- *Simple installation, E27 lamp holder can work;
- *360 degree panoramic picture, the picture can change the angle arbitrarily;
- * Million pixels, h.264 compressed format;
- *Duplex call, humanoid trigger alarm
- *Support 4x digital zoom



MTYP5D

Features:

- *1920X1080P
- * H.265 compressed format
- * Support 16x digital zoom
- * 10 meter visual range
- * 355 degree panoramic picture
- * Size:115X68.5mm



MTYS2-k01

Features:

- *1920X1080P
- * H.264 compressed format
- * 5 meter visual range
- * 100 degree panoramic picture



MTYS10

- * Solar panel universal adjustment, built-in super capacity battery
- * Ultra-low power standby, quick wake up in 0.2 seconds
- * PIR sensor + radar dual alarm detection
- * High-performance ISP and 1/2.7" progressive sensor, blacklight full color
- * 1920*1080P HD video
- * Built-in microphone and loudspeaker, support two way audio
- * Support Cloud storage and local storage
- * APP support Android/IOS
- * IP65 waterproof
- * Support All-in-One installation and separated installation



MTPP6

- * Full HD 1080p Battery Powered Security Camera with PIR Sensor (with Solar Panel for Continuous Power Charging Outdoor)
- * The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- * T21Z Chipset, More functions and lower power consumption
- * Infrared night vision, guarding family safety 24 hours a day
- * Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- * 2pcs 18650 rechargeable batteries, standby for up to 6 months
- * 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- * LinUX operating system, start faster, run more stable
- * Wi-Fi/AP connection, no wiring required
- * HD 2.0MP image sensors for recording clear dynamics
- * Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- * Support iOS and Android systems



MIPC216

- * Ip 66
- * 1080p Wifi Waterproof Bullet Solar Panel
- * Charging Metal Camera
- * Real Time Message Push
- * Rechargeable Solar Panel With 4pcs 18650 Batteries
- * Standby 4-6 Months
- * 6w Solar Board



MSZ01

- * HD 2 million pixel CMOS image sensor, which has good low illumination effect and high image definition.
- * Support 2.0MP (1920*1080P) HD resolution.
- * Support IR-CUT day and night switching, support day and night full color, APP free switching.
- * Support phone wake-up and PIR wake-up.
- * Support two-way voice intercom.
- * Support SD card storage, cloud storage, video query playback.
- * Support device sharing .
- * Its own intelligent detection algorithm effectively reduces false alarms.
- * The device configuration can be realized in only 2 steps.
- * The fastest time to wake up to see the image can be within 3 seconds, and the message will be pushed within 1 second.



Features:

1080P And 3MP HD Camera
3.6mm lens 100° view angle
Build in 6pcs LEDS IR Distance 5M
Pan 355° Tilt 80°
Support Remote play Lullaby, build in 6 lullabies
Support Temperature Detection
Support Baby Cry Detection
Support Two way audio communication
Support 802.11b/g/n 2.4G Wifi
Support Cloud storage or max 128GB TF card



1080P Low-power Solar Battery Outdoor Camera

Tuya / onecam App




WIFI

Wireless
Wiring-free
Long standby



Smart Solar Camera

TP-P6T

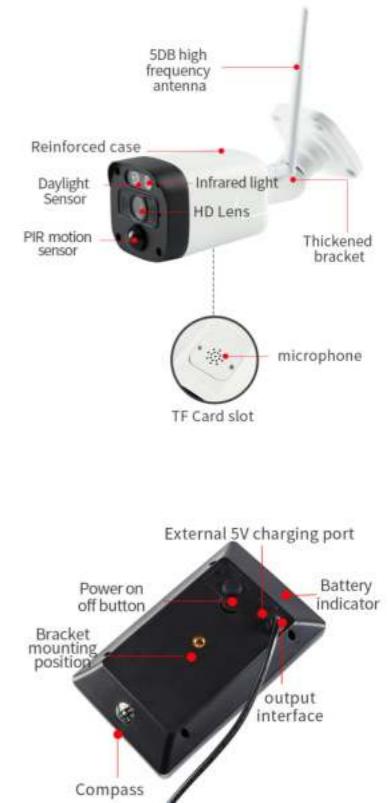




Features:

- * Full HD 1080p Battery Powered Security Camera with PIR Sensor
- * The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- * T21Z Chipset, More functions and lower power consumption
- * Infrared night vision, guarding family safety 24 hours a day
- * Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- * 2pcs 18650 rechargeable batteries, standby for up to 6 months
- * 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- * LinUX operating system, start faster, run more stable
- * Wi-Fi/AP connection, no wiring required
- * HD 2.0MP image sensors for recording clear dynamics
- * Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- * Support iOS and Android systems



Features:

Simple installation, E27 lamp holder can work;
 360 degree panoramic picture, the picture can change the angle arbitrarily;
 2 million and 3 million pixels, h.265 compressed format;
 3. Duplex call, humanoid trigger alarm
 Support 4x digital zoom

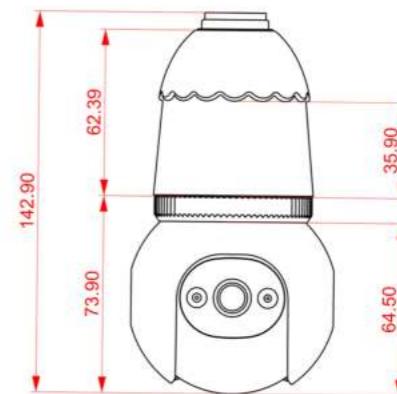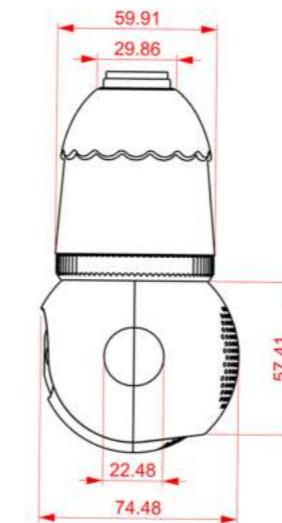



Features:

2.0MP WIFI camera
 Support WIFI function, 2dB antenna
 Two-way voice intercom function
 Excellent adaptive night vision automatic function(Support manual adjustment)
 20m infrared night vision, low light environment, details are clearly visible
 Support automatic/alarm/timed recording
 Support multi-terminal real-time viewing
 Support online operations on major platforms, support screen drag, rotate and other operations
 Support TF card slot (TF card not included)



Technical Parameter			
Platform Support	Android IOS	Camera Resolution	2.0MP
Transfer Method	2.4G (WIFI)	WIFI Bandwidth	20Mhz(Standard)
TF Card	Max 128G	Camera Power Consumption	Support
Night Vision Distance	20m	Cloud	Support
Audio Codec	G.711A	Audio Input	Built-in Microphone
Audio Output	Built-in Speaker	Intercom	Support
Light Detection	CDS	Capture	Support
Alarm Function	Support	Wottage	4W
Material	PC+ABS	Operating Temperature	-20~+65°C
Power Consumption	Max 2.5W	Product Size	150*155*115mm(L*W*T)

HD Quality



Features:

- 2.0MP WIFI camera
- Support WIFI function,
- Two-way voice intercom function
- function(Support manual adjustment)
- details are clearly visible
- Support automatic/alarm/timed recording
- Support TF card slot (TF card not included)
- Support cloud storage



Quick access with fingerprint with low false
recognition rate, good for old man or kids



Smart Life Tuya



Keyless Smart Cylinder

No breaking the door or change the door body.

MSL-S1



Orginal





Replace

Product Parameters

Reader Dimension:	42x42mm
Power Source:	1 x CR123A(Alkaline)
Material:	Aluminum Alloy/Brass
Installation:	Intermediate;Tools required(Included)
Unlock Way:	App,Fingerprint,Keycard,Manual key
IP Class:	IP5x(Dust and Splash Proof)
Emergency Power:	1x Micro Type-C charging port
Door Thickness:	35-45mm

Dimension



4 Ways to unlock



Fingerprint



IC Card



Tuya APP




Key




Camera Smart Lock

ME-098

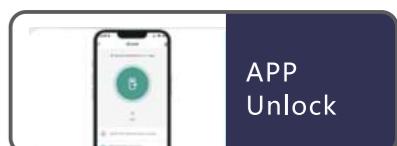

PRODUCT PARAMETERS


Model:	E908
Material:	Curved tempered glass aluminum alloy
Color:	● Black
Unlock Way:	Fingerprint/Password/card//APP/key
Cylinder:	C Level
Power Supply:	8 AA batteries
Available Door:	Wood door/Security door /Bronze door/Iron door
Available Thickness:	40MM~80MM
Unlock Direction:	Universal for left/right
Lock Size/with rubber:	370*75mm/373x78mm

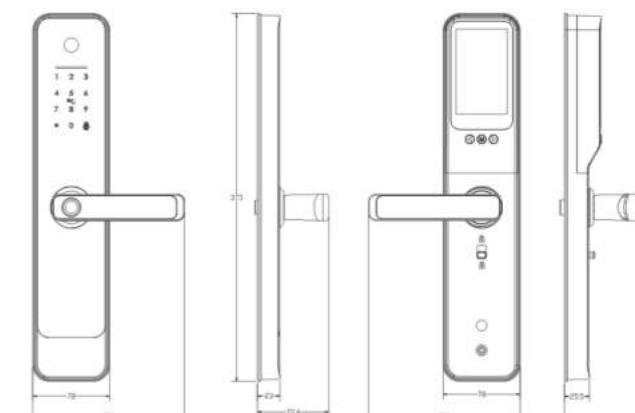






Features:

- * Front panel size: 420mm × 76mm × 65mm
- * Rear panel size: 420mm × 76mm × 65mm
- * Suitable door thickness: 40-120mm
- * Material: carbon steel+aluminum alloy
- * Process: Electric spray
- * Painting Color: matte black
- * Key type: capacitive touch screen
- * Key material: tempered glass

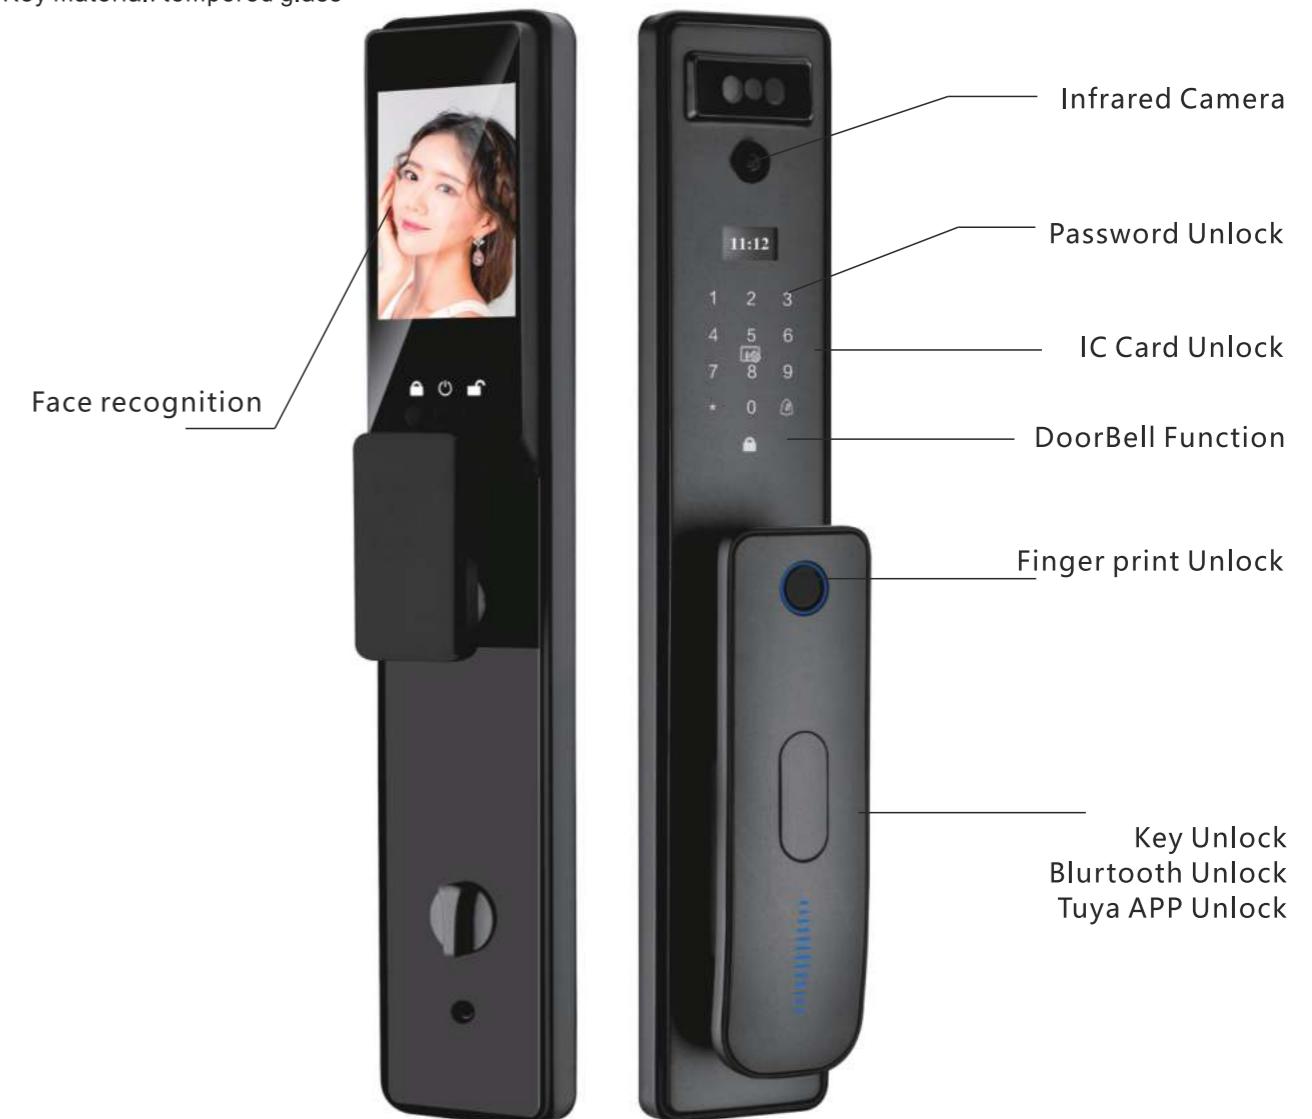

Smart Lock

M-H168

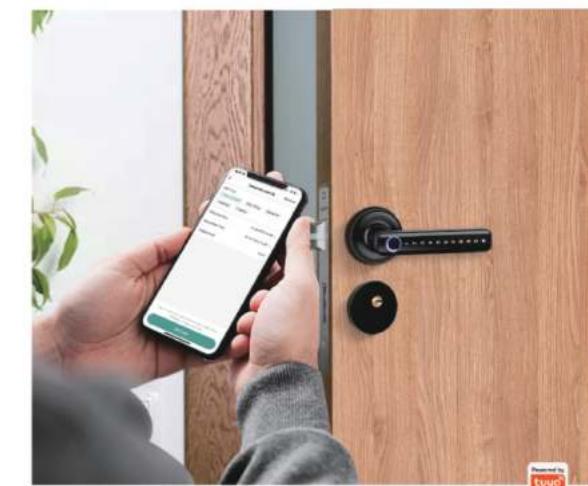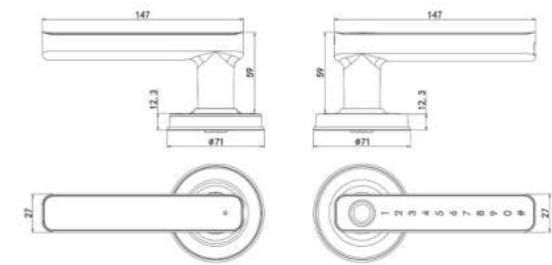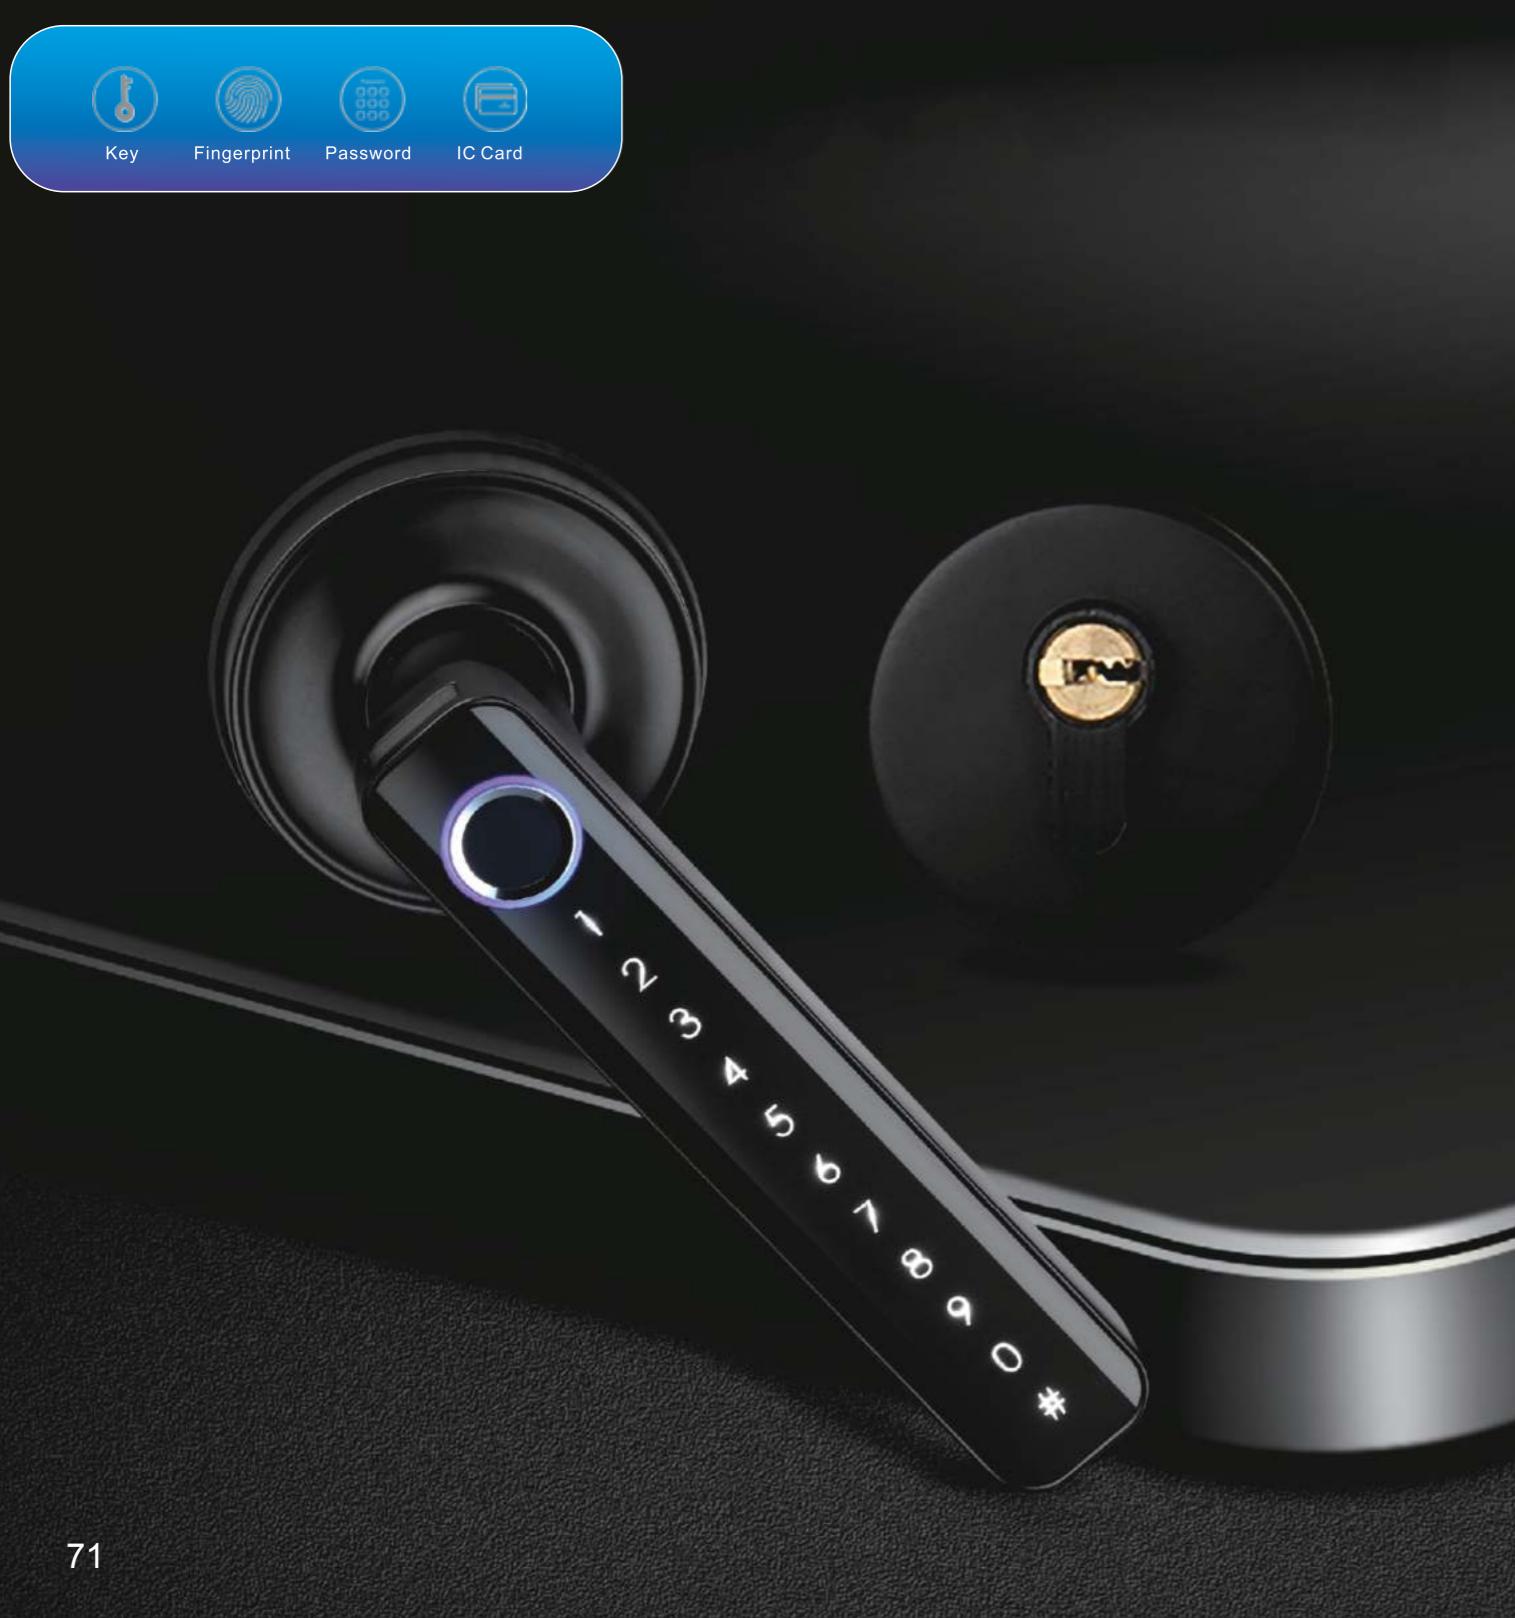

Model:	H168	Material:	Aluminum Alloy+PC+Acrylic
Color:	● Black	Unlock Way:	Fingerprint/App/Password
Cylinder:	C Level	Power Supply:	4 pcs AAA batteries
Fingerprint capacity:	50	Passcode:	No limit cyclic
Available Door:	Wood/Steel	Available Thickness:	35mm-55mm
Unlock Direction:	Universal for left/right	Emergency Power:	MicroUSB
Product Dimension:	147x71x71mm		

Semi-conductor Fingerprint Sensor 360 Degree Recognition

Quick access with fingerprint with low false recognition rate, good for old man or kids

0.3 s **50** USERS
Quick Recognition Large capacity user






Materials	High Density Aluminium Alloy
Surface Treatment	Anodization
Fingerprint Reader	Living Fingerprint Recognition, 0.5second Speed Recognition
Administrator Capacity	100 Pcs
User Capacity	100pcs
Fingerprint Capacity	100pcs
Password Capacity	20pcs
IC Card Capacity	50pcs
Bluetooth	Tuya App/smart Life
Fingerprint Resolution	500DPI
False Accept Rate	(FRA)<0.001%
False Rejection Rate	(FRR)<0.1%
Power Supply	4pcs AABattery
Working Relative Humidity	20%RG-90%RH
Door Thickness	35mm-65mm
Lock Body	Single-latch, and Suitable For The Lock Body Which's Backset Is Bigger Than 45mm



MSLD-01BR
Bronze

MSLD-01B
Black


MSLD-01G
Gold

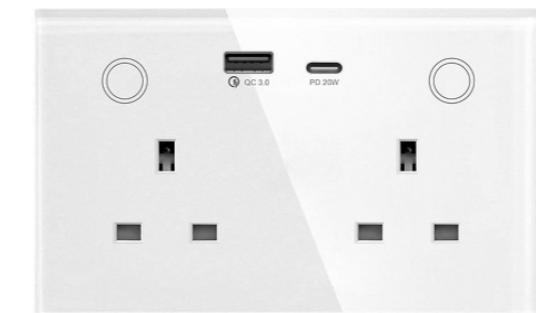

White



Black

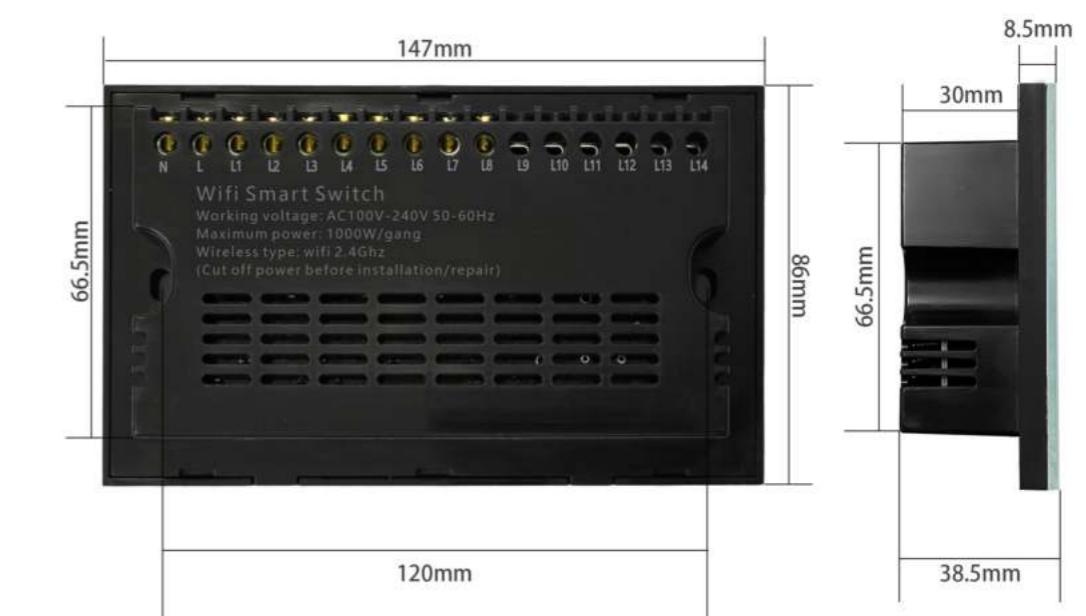



White



Black

