


Underwater Light Series



AUST TECH
ENGINEERING & SUPPLIES PTY LTD


Underwater Light Series

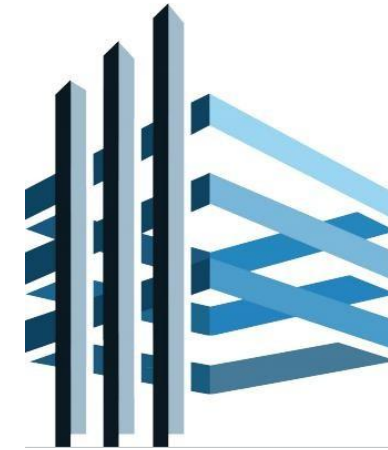

PK6001S Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.5mm²x1.5m
(White color/Auto color change)

Waterproof standard: IP68
Available: LED 6x1W / 12V

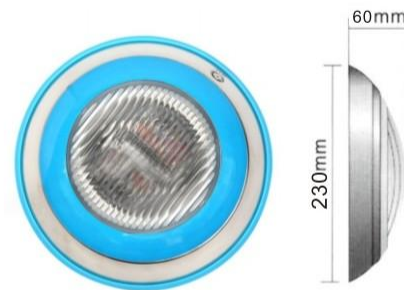

PK6003 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.5mm²x1.5m
Waterproof standard: IP68
(White color/Auto color change)

Available:
1. 144 LED Bulbs 12W/12V
2. LED 6x1W/12V
3. LED 9x1W/12V
4. LED 12x1W/12V



PK6001 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 2x1.5mm²x1.5m
1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
4. LED 18x1W/12V
5. LED 24x1W/12V



PK6005 Wall mounted type pool light

Material: ABS+UV
Waterproof standard: IP68
Available:

1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)



PK6004S Wall mounted type pool light

Material: ABS+UV
Cable: 3x1.5mm²x1.5m
1. 144 LED Bulbs 12W/12V
2. LED 6x1W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
3. LED 9x1W/12V
4. LED 12x1W/12V



PK6004 Wall mounted type pool light

Material: ABS+UV
Available:
1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)

Cable: 2x1.5mm²x1.5m
Waterproof standard: IP68
4. LED 12x1W/12V
5. LED 18x1W/12V
6. LED 24x1W/12V

Underwater Light Series



PK6006 Wall mounted type pool light

Material: ABS+UV
Cable: 2x1.5mm²x1.5m

1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
3. LED 12x1W/12V
4. LED 18x1W/12V



PK6007 Wall mounted type pool light

Material: ABS+UV
Cable: 2x1.5mm²x1.5m
1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
3. LED 12x1W/12V
4. LED 18x1W/12V



PK6009 Wall mounted type pool light

Material: 304 Stainless steel+ABS+UV
Cable: 2x1.5mm²x1.5m
Bulbs 12W/12V
Bulbs 18W/12V
(White color/Auto color change)

Waterproof standard: IP68

AUST TECH
ENGINEERING & SUPPLIES PTY LTD



PK6017 Buried type pool light (for liner pool)

Material: ABS+UV
Waterproof standard: IP68
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. LED 12x1W/12V
(White color/Auto color change)

Cable: 2x4mm²x1.5m

5. LED 18x1W/12V
6. LED 24x1W/12V
7. LED 18x3W 35W/12V

PK6017 Buried type pool light

Material: ABS+UV
Waterproof standard: IP68
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)


Cable: 2x4mm²x1.5m
5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 18x3W 35W/12V



PK6016 Buried type pool light

Material: ABS+UV
Cable: 2x4mm²x1.5m
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)

Waterproof standard: IP68
5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 18x3W 35W/12V

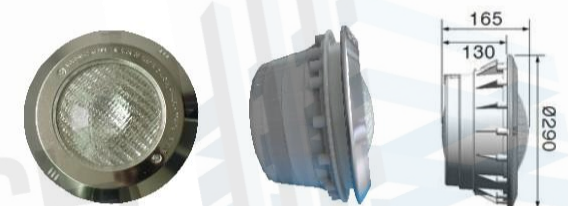

PK6016A Buried type pool light

Material: 304 Stainless steel+ABS+UV
Cable: 2x4mm²x1.5m
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)

Waterproof standard: IP68
5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 18x3W 35W/12V

Underwater Light Series



PK6010 Buried type pool light

Material: 304 Stainless steel
Waterproof standard: IP68
Available:
 1. 100W/12V Halogen light bulb
 2. 36 LED Bulbs 3W/12V
 (White color/ Auto color change)

Cable: 3x2.5mm²x1.5m
 3. 90 LED Bulbs 6W/12V



PK6011 Buried type pool light

Material: 304 Stainless steel
Waterproof standard: IP68
Available:
 1. 300W/12V Halogen light bulb
 2. 252 LED Bulbs 18W/12V
 (White color/ Auto color change)

Cable: 3x4mm²x1.5m



PK6627 Buried type pool light

Watt: 12/18/25/35W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel


Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.5mm²x2.5m



PK6629 Buried type pool light

Watt: 3/6W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm²x1.5m

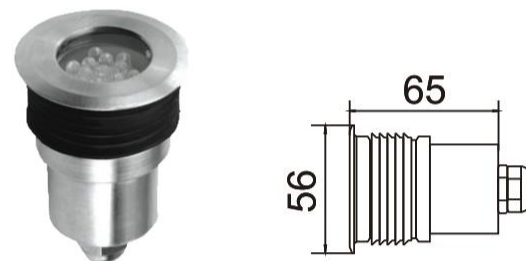

PK6631 Buried type pool light

Material: AISI-304 Stainless steel
Waterproof standard: IP68
Watt/Voltage: 1W/12V



PK6628 Buried type pool light

Watt: 6/9/12/18W
Voltage: AC/DC 12V/24V
Material: Electrolytic tre of stainless s



PK6630 Buried type

Watt: 12/18/25W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm²x1.5m




PK6632 Buried type pool light

Watt: 6/9/12/18W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm²x1.5m

RGB Series Underwater Light

RGB Remote Control

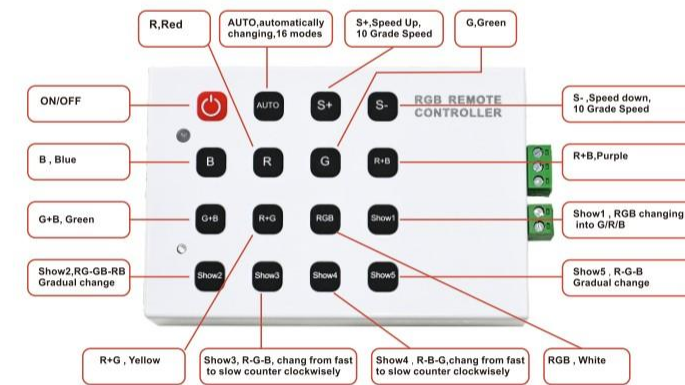


PK041 RemoteControl



Detail parameter
 Battery: 23A 12V
 Working current: <30mA
 Control power: 600W
 Handle transmitting frequency: 315MHz
 Rf remote output power: 3mW
 Remote control size: 132*52*15mm
 Remote control distance: 30 meters in open area, built-in antenna

Wiring Diagram

AUST TECH
 ENGINEERING & SUPPLIES PTY LTD

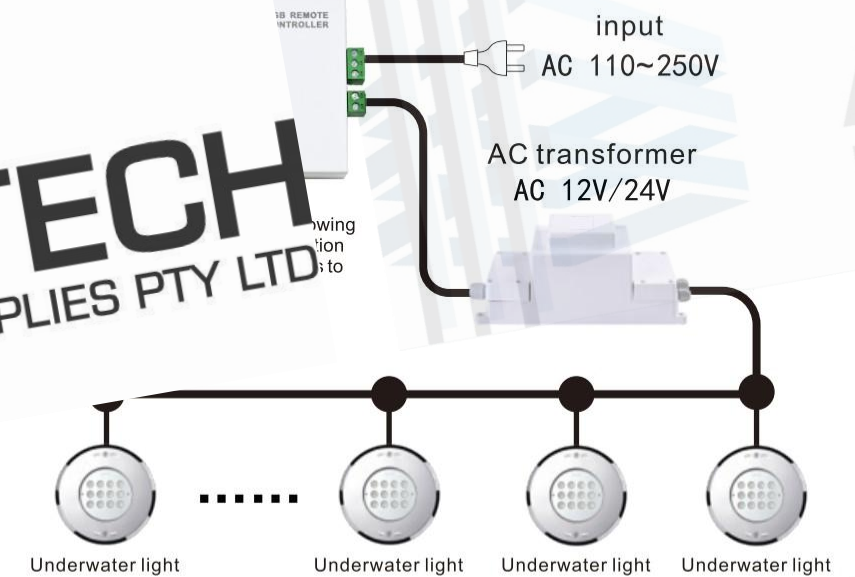

RGB INSTRUCTION

MODE1: BLUE **MODE2: RED** **MODE3: GREEN** **MODE4: RB,PURPLE**
MODE5: GB, GREEN **MODE6: RG, YELLOW** **MODE7: RGB, WHITE**
MODE8: (R G B↓) RG KEEP BRIGHT, B CHANGE TO DARK GRADUALLY1.9S → (R↓ G) G KEEP BRIGHT, R CHANGE TO DARK GRADUALLY1.9S → (G↓) G CHANGE TO DARK GRADUALLY1.9S → (R G↓ B) RB KEEP BRIGHT, G CHANGE TO DARK GRADUALLY1.9S → (R B↓) R KEEP BRIGHT, B CHANGE TO DARK GRADUALLY1.9S → (R↓) R CHANGE TO DARK GRADUALLY1.9S → (R↓ G B) GB KEEP BRIGHT, R CHANGE TO DARK GRADUALLY1.9S → (G↓ B) B KEEP BRIGHT, G CHANGE TO DARK GRADUALLY1.9S → (B↓) B CHANGE TO DARK GRADUALLY1.9S → RECYCLE
MODE9: (R↓ G↑) REN IS DARKENING AND GREEN IS BRIGHTENING1.9S → (G↓ B↑) GREEN IS DARKENING AND BLUE IS BRIGHTENING1.9S → (R↑ B↓) BLUE IS DARKENING AND REN IS BRIGHTENING1.9S → RECYCLE
MODE10: R (60MS) → G (60MS) → B (60MS) → RECYCLE10TIMES → R (120MS) → G (120MS) → B (120MS) → RECYCLE5TIMES → R (180MS) → G (180MS) → B (180MS) → RECYCLE 5 TIMES → R (240MS) → G (240MS) → B (240MS) → RECYCLE 5 TIMES → RECYCLE FROM THE BEGINNING TO THE END(COUNTER CCLOCK WISELY)
MODE11: R (100MS) → B (100MS) → G (100MS) → RECYCLE 5TIMES → R (160MS) → B (160MS) → G (160MS) → RECYCLE 5 TIMES → R (220MS) → B (220MS) → G (220MS) → RECYCLE 5TIMES → R (280MS) → B (280MS) → G (280MS) → RECYCLE 5 TIMES → RECYCLE FROM THE BEGINNING TO THE END(CCLOCK WISELY)



RGB Series Underwater Light



PK8001 Wall mounted type pool light

Material: PC
Cable: 2x1.0mm²X1.5m

- 1.LED Bulbs 18W/12V/24V
2.LED Bulbs 25W/12V/24V
(White color/ Auto color change)

Waterproof standard: IP68
Available:

- 3.LED Bulbs 35W/12V/24V
4.LED Bulbs 40W/12V/24V



PK8003 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.0mm²X1.5m

- 1.LED Bulbs 18W/12V/24V
2.LED Bulbs 25W/12V/24V
3.LED Bulbs 35W/12V/24V

(White color/ Auto color change)

Waterproof standard: IP68
Available:

- 4.LED Bulbs 40W/12V/24V
5.LED Bulbs 12x1W/12V/24V
6.LED Bulbs 18x1W/12V/24V



PK8005 Wall mounted type pool light


Material: 304 Stainless steel
Cable: 2x1.0mm²X1.5m

- 1.LED Bulbs 12W/12V/24V
2.LED Bulbs 18W/12V/24V
3.LED Bulbs 25W/12V/24V

(White color/ Auto color change)

Waterproof standard: IP68
Available:

- 4.LED Bulbs 9x1W/12V/24V
5.LED Bulbs 12x1W/12V/24V

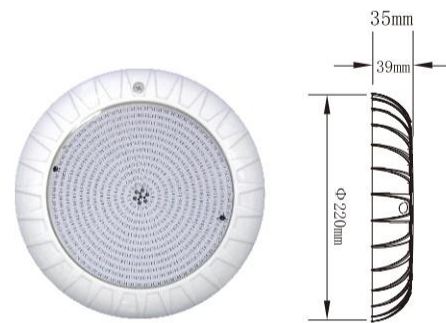

PK8002 Wall mounted type pool light

Material: PC
Cable: 2x1.0mm²X1.5m

- 1.LED Bulbs 12W/12V/24V
2.LED Bulbs 18W/12V/24V
3.LED Bulbs 25W/12V/24V
(White color/ Auto color change)

Waterproof standard: IP68
Available:

- 4.LED Bulbs 9x1W/12V/24V
5.LED Bulbs 12x1W/12V/24V



PK8004 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.0mm²X1.5m

- 1.LED Bulbs 12W/12V/24V
2.LED Bulbs 18W/12V/24V
3.LED Bulbs 25W/12V/24V

(White color/ Auto color change)

TRANSFORMERS



VTP-042
Transformers

(220V→12V) 50Hz/60Hz
60W / 105W / 200W / 300W / 400W



SP-034
Junction Box

Water Descent




Technical Information

Model	Connection size	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
WD300-25-LED	1.5 inch	50mm	306	138	76	25	4W DC12V
WD300-150-LED	1.5 inch	50mm	306	263	76	150	4W DC12V
WD300-230-LED	1.5 inch	50mm	306	343	76	230	4W DC12V
WD600-25-LED	1.5 inch	50mm	606	138	76	25	8W DC12V
WD600-150-LED	1.5 inch	50mm	606	263	76	150	8W DC12V
WD600-230-LED	1.5 inch	50mm	606	343	76	230	8W DC12V
WD900-25-LED	1.5 inch	50mm	906	138	76	25	12W DC12V
WD900-150-LED	1.5 inch	50mm	906	263	76	150	12W DC12V
WD900-230-LED	1.5 inch	50mm	906	343	76	230	12W DC12V
WD1200-25-LED	1.5 inch	50mm	1206	138	76	25	17W DC12V
WD1200-150-LED	1.5 inch	50mm	1206	263	76	150	17W DC12V
WD1200-230-LED	1.5 inch	50mm	1206	343	76	230	17W DC12V

Without LED light							
WD300-25	1.5 inch	50mm	306	138	76	25	- -
WD300-150	1.5 inch	50mm	306	263	76	150	- -
WD300-230	1.5 inch	50mm	306	343	76	230	- -
WD600-25	1.5 inch	50mm	606	138	76	25	- -
WD600-150	1.5 inch	50mm	606	263	76	150	- -
WD600-230	1.5 inch	50mm	606	343	76	230	- -
WD900-25	1.5 inch	50mm	906	138	76	25	- -
WD900-150	1.5 inch	50mm	906	263	76	150	- -
WD900-230	1.5 inch	50mm	906	343	76	230	- -
WD1200-25	1.5 inch	50mm	1206	138	76	25	- -
WD1200-150	1.5 inch	50mm	1206	263	76	150	- -
WD1200-230	1.5 inch	50mm	1206	343	76	230	- -


AUST TECH
ENGINEERING & SUPPLIES PTY LTD

Model Patent Certificate : ZL 2017 2 0295318.6

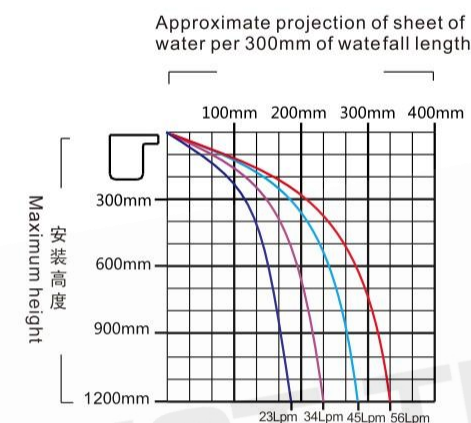


"PIKES" water descent are suitable for installation on finished walls and new construction walls, as well length and thickness of the wall product design unique novel, beautiful. Efficient to hide the outlet, Showing a beautiful linear effect of the water.

WATER DESCENT WITH VALVE INSTALLATION

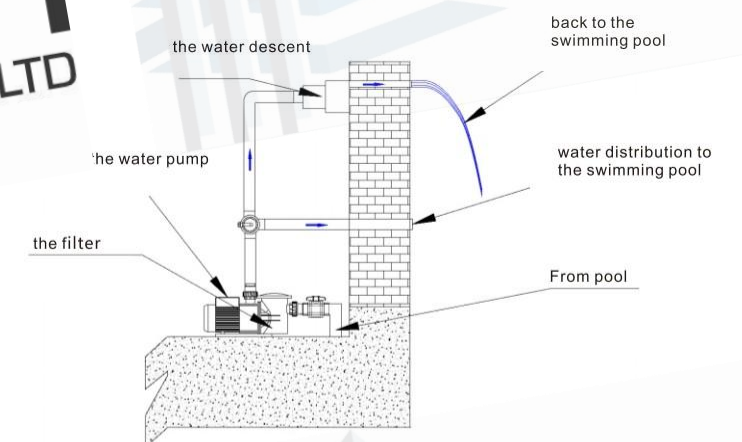

MULTIPLE WATER DESCENT WITH VALVE MOUNTING

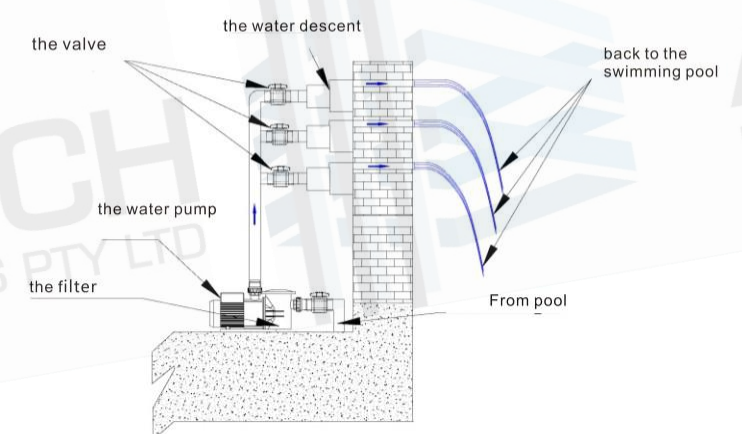

New Water Descent






“PIKES” water descent provides several sizes and configurations to be available for different installation requirements. With a suitable water pump and filtration system, you can enjoy vibrant water falling effect, which will bring elegance and visual interest to the private gardens, swimming pools, parks or gardens. The soothing sound of the water flowing will add pleasure to people.

FEATURES

- Replaceable light bar with line length of 3m.
- Easy to install bottom water inlet
- High stability, advanced artificial waterfall over in China
- Built-in waterproof LED lights to beautify the water color
- The LED lights are powered by 12V DC, RGB light source are safe and reliable
- The LED lights can be operated through remote control, different light mode changes
- The outlets of the waterfall are available in different sizes to meet different installation requirements
- Multiple water descent systems can be connected to one controller to meet the effect synchronization of light mode

WATER DESCENT WITH VALVE INSTALLATION

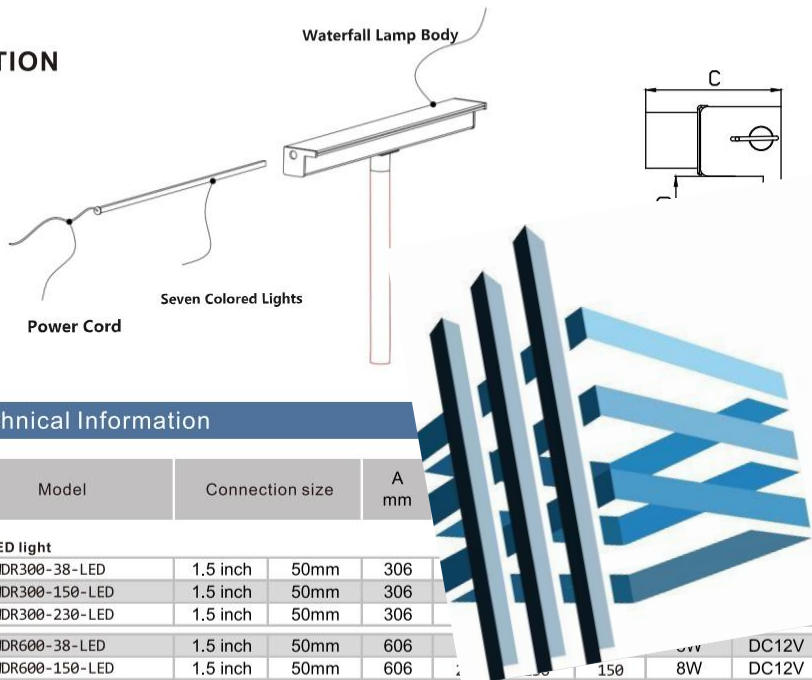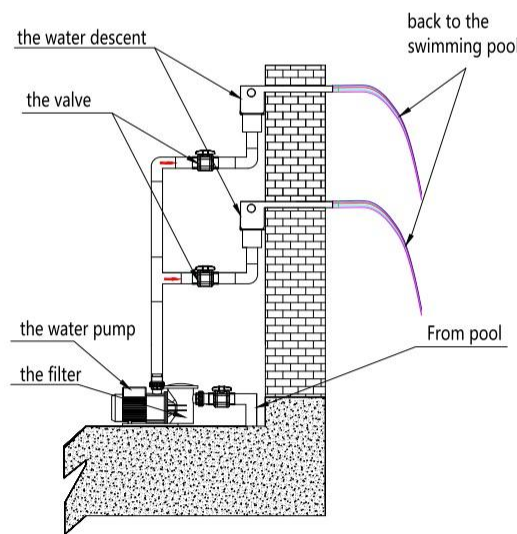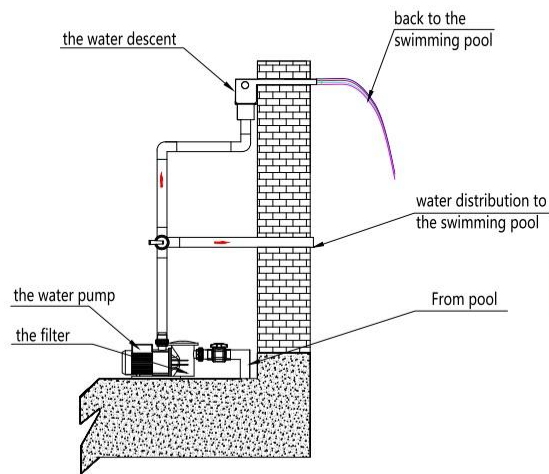

Technical Information

Model		Connection size		A mm				
With LED light								
WDR300-38-LED	1.5 inch	50mm	306					
WDR300-150-LED	1.5 inch	50mm	306					
WDR300-230-LED	1.5 inch	50mm	306					
WDR600-38-LED	1.5 inch	50mm	606					DC12V
WDR600-150-LED	1.5 inch	50mm	606			150	8W	DC12V
WDR600-230-LED	1.5 inch	50mm	606	301	136	230	8W	DC12V
WDR900-38-LED	1.5 inch	50mm	906	109	136	38	12W	DC12V
WDR900-150-LED	1.5 inch	50mm	906	221	136	150	12W	DC12V
WDR900-230-LED	1.5 inch	50mm	906	301	136	230	12W	DC12V
WDR1200-38-LED	1.5 inch	50mm	1206	109	136	38	17W	DC12V
WDR1200-150-LED	1.5 inch	50mm	1206	221	136	150	17W	DC12V
WDR1200-230-LED	1.5 inch	50mm	1206	301	136	230	17W	DC12V

Without LED light						
WDR300-38	1.5 inch	50mm	306	109	136	38
WDR300-150	1.5 inch	50mm	306	221	136	150
WDR300-230	1.5 inch	50mm	306	301	136	230
WDR600-38	1.5 inch	50mm	606	109	136	38
WDR600-150	1.5 inch	50mm	606	221	136	150
WDR600-230	1.5 inch	50mm	606	301	136	230
WDR900-38	1.5 inch	50mm	906	109	136	38
WDR900-150	1.5 inch	50mm	906	221	136	150
WDR900-230	1.5 inch	50mm	906	301	136	230
WDR1200-38	1.5 inch	50mm	1206	109	136	38
WDR1200-150	1.5 inch	50mm	1206	221	136	150
WDR1200-230	1.5 inch	50mm	1206	301	136	230


New Water Descent




AUST TECH
ENGINEERING & SUPPLIES PTY LTD

Operating Temperature	Input	Output	Transmitting Distance
-20+40°C	AC 100V-240V 50/60HZ	DC 12V/24W	3M
-20+40°C	AC 100V-240V 50/60HZ	DC 12V/60W	20M


	Length	Voltage	Power
L90	300mm	DC12V	4W
L120	600mm	DC12V	8W
	900mm	DC12V	12W
	1200mm	DC12V	17W

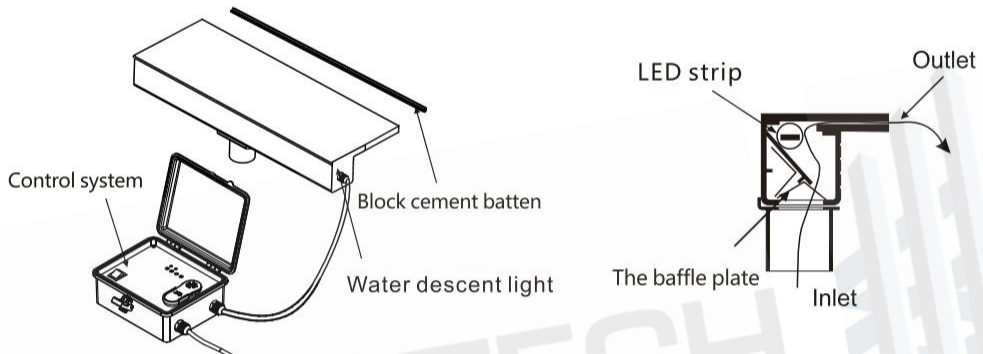


Do not move the retaining bar before installation is complete, and avoid prolonged exposure to the sun!

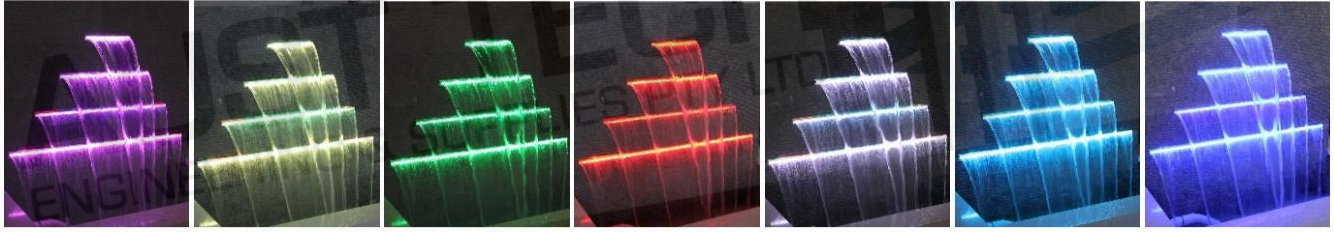

Acrylic Pool Water Fall

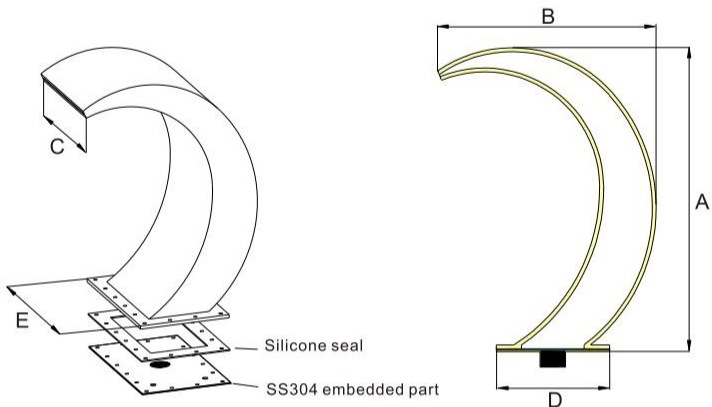

Technical Characteristics									
Model	Connection Size		A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Power	Voltage
WF-300	1.5 inch	50mm	603	423.5	320	236	416	—	—
WF-301	2 inch	63mm	750	540.6	395	280	500	—	—
WF-300LED	1.5 inch	50mm	603	423.5	320	236	416	12.0W	DC12V
WF-301LED	2 inch	63mm	750	540.6	395	280	500	13.0W	DC12V

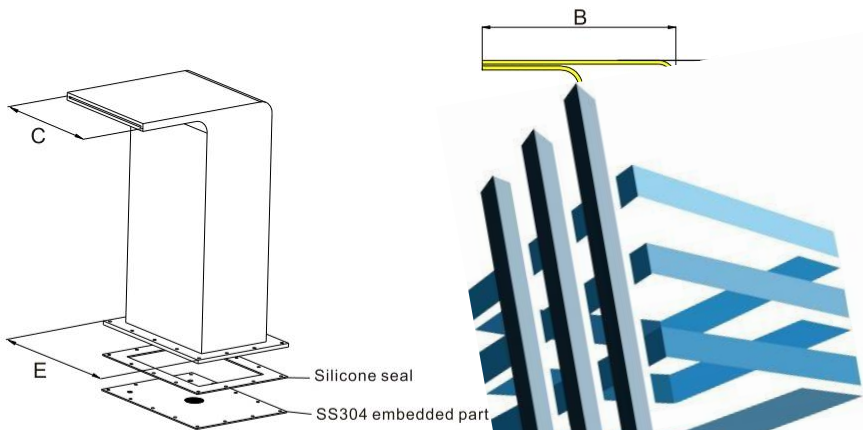

Technical Characteristics									
Model	Connection Size		A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Power	Voltage
WF-302	1.5 inch	50mm	603	450	300	280	400	—	—
WF-303	2 inch	63mm	800	500	400	350	500	—	—
WF-302LED	1.5 inch	50mm	603	450	300	280	400	13.0W	DC12V
WF-303LED	2 inch	63mm	800	500	400	350	500	14.0W	DC12V

K-01




K25




MODEL : K25

Operating temperature	-20~+40°C
Input	AC 100V-220V 50/60Hz
Output	DC 12V/60w
Transmitting distance	20m

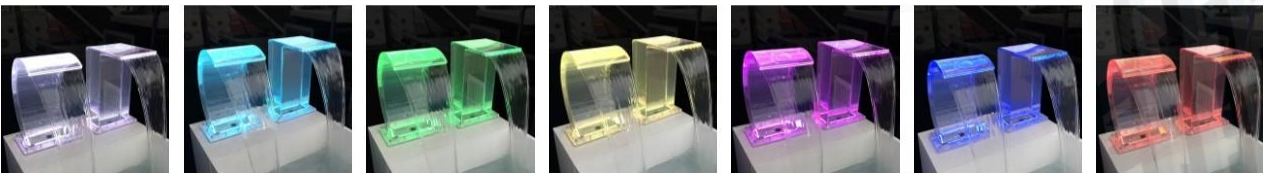

Acrylic Pool Water Fall

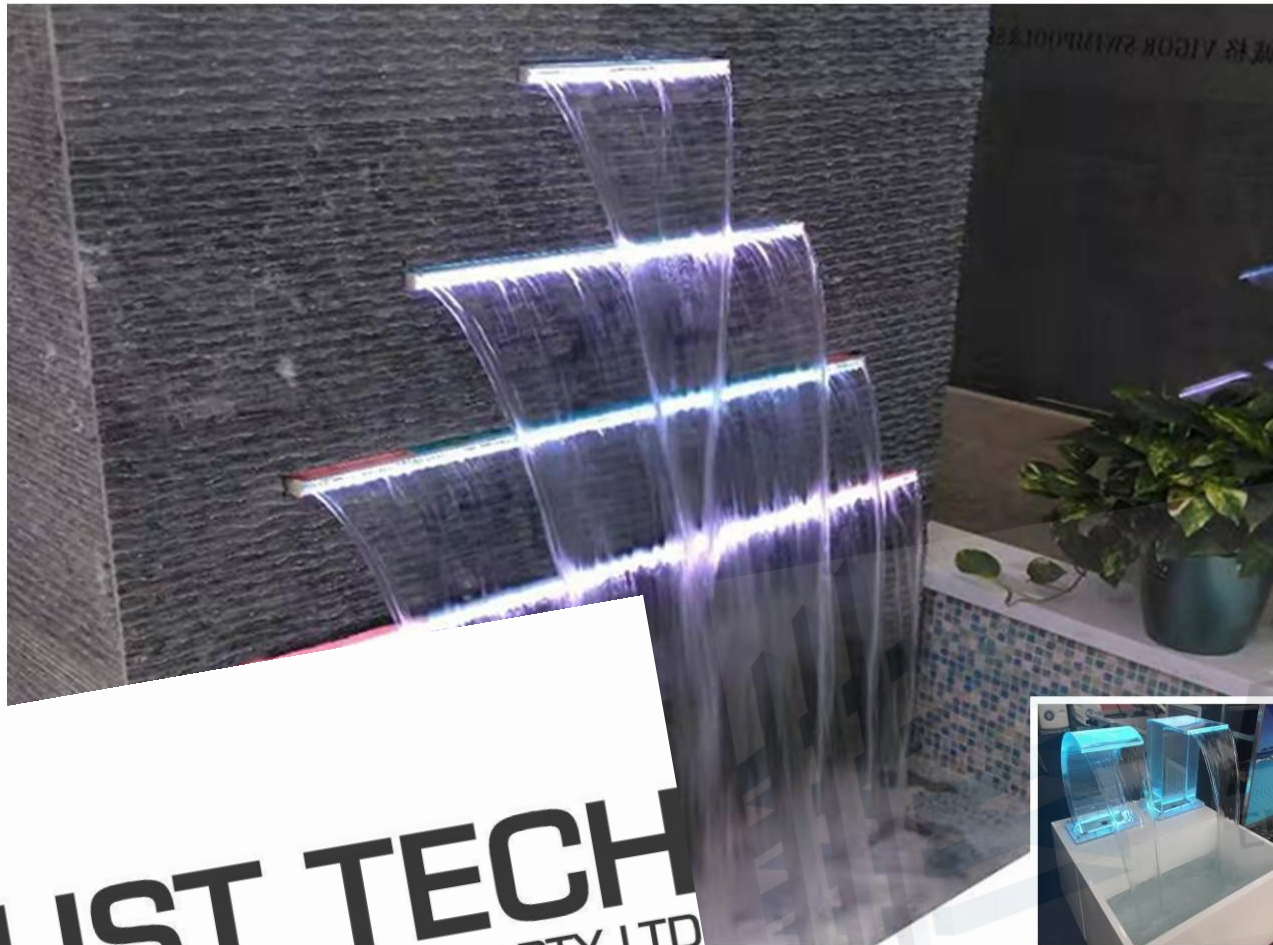

AUST TECH
ENGINEERING & SUPPLIES PTY LTD

